

## 타이어 트레드밴드 진동 음향방사 예측

A Prediction of Sound Radiation from  
Tire Treadband Vibration

김 병 삼\* · 조 성 곤\*\*

Byoung-Sam Kim · Seong-Gon Cho

(1995년 9월 13일 접수, 1997년 3월 28일 채택)

## ABSTRACT

The noise generated from a treadband mechanism of a tire has been the subject of this research. In particular, the treadband has been treated as an infinite tensioned beam resting on an elastic foundation which includes damping. The main objective is to predict the sound power generated from a system mentioned above by locating harmonic point forces representing the excitation of treadband at the contact patch. It is possible to predict the sound power radiated from this structure by using wavenumber transformation techniques. In order to find out the minimum radiated sound power, All parameters were varied. Thus, this model can be used as a tire design guide for selecting parameters which produces the minimum noise radiation.

## 국 문 요 약

최근, 차량의 생활환경 소음에 대한 규제가 점점 강화되고 있다. 특히, 차량으로부터 발생하는 여러가지 소음원 중에서 타이어로부터 발생하는 소음의 비중이 점점 증가하는 추세이다. 따라서, 본 연구에서는 타이어의 트레드밴드로 부터 발생하는 소음에 대하여 연구하였다. 본 연구에서는 타이어 트레드밴드를 장력, 감쇠, 기초강성 등이 고려된 무한 보로 가정하였고, 타이어 트레드밴드에 조화집중이동하중이 가해질 때 트레드밴드로 부터 발생하는 소음을 예측하고자 하였다. 트레드밴드로 부터 방사되는 음향파위는 공간좌표의 푸리에 변환을 이용하여 예측할 수 있으며, 타이어 내부 공기압에 의한 장력, 재질의 특성에

\* 순천공업전문대학 환경공학과

\*\* 순천공업전문대학 산업안전관리과

의한 감쇠, 기초강성 등의 변화가 트레드밴드로 부터 방사되는 음향파위에 미치는 영향을 조사하였다. 한편, 본 연구에서 제시한 모델은 저소음 타이어 개발을 위한 타이어 설계 자료의 일환이다.

**1. Introduction**

The model of tread element may be used to predict the force exerted on the treadband by the treadband by the tread elements produced by contacting the road. Here, this tread element model assumed to be an infinite beam model so that treadband can be treat as an infinite alastic beam. the elastic foundation represents the sidewall stiffness supporting the treadband. By using wavenumber transformation techniques make possible to predict the sound power radiated by such a structure.

The problems in sound radiation of elastic beam under the action of harmonic point forces moving at subsonic speeds is studied. The reaction due to light fluid loading on the vibratory response of the beam is taken into account. The beam is assumed to occupy the plane  $z=0$ . The material of beam and the elastic foundation are also assumed to be lossless and governed by the law of Bernolli-Euler berm theory including a tension force(T), damping coefficient(C), stiffness of foundation( $k_s$ ).

Mogilevskii<sup>1)</sup> studied the problems related sound radiation from beams under the action of a moving harmonic point force in the absence of an elastic foundation. Keltie<sup>2)</sup> computed the sound power produced by a point-forced elastic beam and obtained quantitative measures of the power produced by the flexural nearfield and the propagating portions of the beam's response.

The non-dimensional sound power is derived by integrating of the surface intensity distribution over the entire beam. The expression for sound power is integrated numerically and the results are examined as a function of Mach number, M, the wavenumber ratio,  $\gamma$ , and stiffness factor,  $\Psi$ .

All parameters may be varied to allow for the identification of optimal values(i.e., the set of parameters which result in minimum radiated sound power). Hence, this model lends itself to the prob-

lem of treadband sound power minimization. Also, the method of superposition suggests that an arbitrary periodic point load may be applied. Such an input causes altering the sequence of the tread element and pitch length, which provides another tool for the minimization of radiated sound power.

The purpose of this paper is to explain the response of a sound power over a number of non-dimensional parameters describing forcing velocity, treadband tension, treadband stiffness, treadband damping and foundation stiffness.

**2. Formulation of Sound Power**

In this section, a mathematical modeling and the key procedures to predict the sound power radiated by such a structure will be described. Under the assumption of a infinite beam occupies the plane  $z = 0$  and the beam is excited by a harmonically oscillating point force moving in the x-direction at the velocity  $\nu_0$ , which is shown in Figure 1.

The space where  $z > 0$  is filled with the air. The infinite beam represents an "unrolled" tire. The sound radiated from the treadband on either side of the contact patch. The equation of motion for the beam is :

$$D \frac{\partial^4 u}{\partial x^4} + \rho_s A \frac{\partial^2 u}{\partial t^2} - T \frac{\partial^2 u}{\partial x^2} + C \frac{\partial u}{\partial t} + k_s U = F_0 \delta(x - \nu_0 t) e^{j\omega t} - p(x, z=0, t) \dots \dots \dots (1)$$

Where  $u(x, t)$  is the transverse displacement of the beam,  $\omega$  is the circular driving frequency, D is the flexural stiffness of the beam;  $\rho_s A$  is the mass per unit length of the beam, T is the axial tension force; C is the foundation damping coefficient;  $k_s$  is the foundation stiffness,  $F_0$  is the input force amplitude, p is the acoustic pressure induced by the surface motion, and  $\delta(x)$  is the Dirac delta function. The pressure distribution induced in the air by the vibration beam is denoted by  $p(x, z, t)$  satisfying the wave equation in two

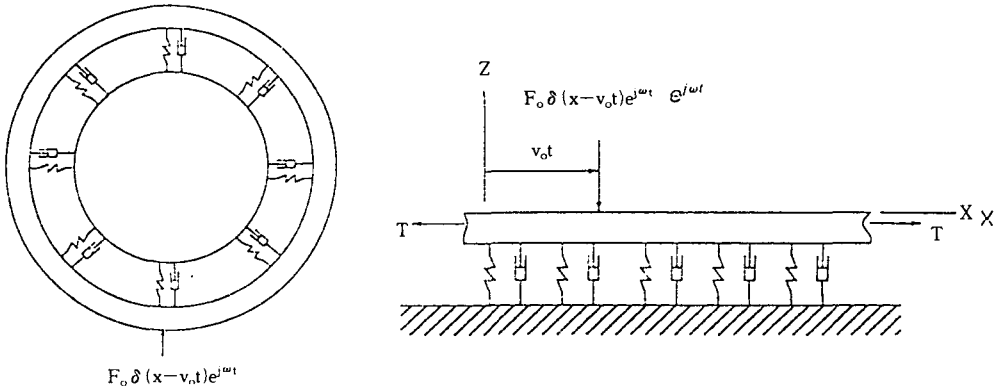


Fig. 1 Treadband vibration model for moving harmonic point forces

dimensional space, and is given by :

$$\left[ \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial z^2} - \frac{1}{c_o^2} \frac{\partial^2}{\partial t^2} \right] = 0 \quad \dots\dots\dots (2)$$

Where  $c_o$  is the sound speed in the acoustic medium. The boundary condition at  $z=0$  is given by

$$\rho_o \frac{\partial^2 u}{\partial t^2} = - \frac{\partial p}{\partial z} \Big|_{z=0} \quad \dots\dots\dots (3)$$

Where  $\rho_o$  is the mass density of the acoustic medium. By applying the spatial Fourier Transformation, the equation becomes

$$FT(f(x)) \int_{-\infty}^{\infty} f(x) e^{j\xi x} dx$$

Where  $\xi$  is the wave number variable. In conjunction with the boundary condition, the time averaged radiated sound power may be obtained by integrating the surface of acoustic intensity distribution over the entire beam. The force function in the wavenumber domain may be written as :

$$\hat{F}(\xi, t) = F_o e^{j(\xi v_o + \omega)t} \quad \dots\dots\dots (4)$$

This form implies that in the wavenumber domain, the transformed displacement  $\hat{U}(\xi, t)$  and pressure  $\hat{p}(\xi, z, t)$  both will have the common factor  $e^{j(\xi v_o + \omega)t}$ .

That is,

$$\hat{U}(\xi, t) = U(\xi) e^{j(\xi v_o + \omega)t} \quad \dots\dots\dots (5a)$$

$$\hat{p}(\xi, z, t) = p(\xi, z) e^{j(\xi v_o + \omega)t} \quad \dots\dots\dots (5b)$$

By substituting equation (5a) and (5b) into the beam equation (1) and the acoustic equation (2), it is easily found that ;

$$U(\xi) = \frac{F_o}{Z_a + Z_b}, \quad \dots\dots\dots (6)$$

$$p(\xi, z=0) = Z_a U(\xi) \quad \dots\dots\dots (7)$$

Where,

$$Z_a = \frac{j\rho_o(\xi v_o + \omega)^2}{\sqrt{(k_o + M\xi)^2 - \xi^2}}$$

$$Z_b = [D\xi^4 - \rho_s A(\xi v_o + \omega)^2 + T\xi^2 + K_s] + j[(\xi v_o + \omega)C] \quad \dots\dots\dots (8)$$

Solving the wave equation,

$$\left[ \frac{\partial^2}{\partial z^2} - \frac{(\xi v_o + \omega)^2}{c_o^2} - \xi^2 \right] p(X, z) = 0,$$

$$\left[ \frac{\partial^2}{\partial z^2} + ((k_o + M\xi)^2 - \xi^2) \right] p(\xi, z) = 0, \quad \dots\dots (9)$$

Therefore, pressure  $p(\xi, z)$  is

$$p(\xi, z) = p(\xi, z=0) e^{-jk_z z}, \quad \dots\dots\dots (10)$$

$$k_z = \begin{cases} -j\sqrt{\xi^2 - (K_o + M\xi)^2} : \xi^2 > (K_o + M\xi)^2, \\ \sqrt{(K_o + M\xi)^2 - \xi^2} : \xi^2 < (K_o + M\xi)^2 \end{cases} \quad \dots\dots\dots (11)$$

Where,  $M$  is the Mach number which is same as  $V/c_o$ , and  $K_o$  is the acoustic wavenumber which is equal to  $\omega/c_o$ . Surface intensity distribution  $I(x)$  is

$$I(x) = \frac{1}{2} \text{Re}[P(x)V^*(x)] \quad \dots\dots\dots (12)$$

Where,  $P(x)$  is surface pressure and  $V^*(x)$  is a conjugate form of surface velocity. By integrating the surface intensity distribution over entire beam, sound power can be obtained from the following formula for a unit width.

$$W = \frac{1}{2} \operatorname{Re} \left[ \int_{-\infty}^{\infty} P(x) V^*(x) dx \right], \dots\dots\dots (13)$$

$$W = \frac{1}{2} \operatorname{Re} \left[ \int_{-\infty}^{\infty} \left[ \frac{1}{2\pi} \int_{-\infty}^{\infty} P(\xi_1) e^{-j\xi_1 x} d\xi_1 \right] \left[ \frac{1}{2\pi} \int_{-\infty}^{\infty} V^*(\xi_2) e^{j\xi_2 x} d\xi_2 \right] dx \right] \dots\dots\dots (14)$$

Where,  $\xi_1, \xi_2$  are dummy variable. There can be written as follows;

$$W = \frac{1}{4\pi} \operatorname{Re} \left[ \int_{-\infty}^{\infty} \left[ \int_{-\infty}^{\infty} P(\xi_1) d\xi_1 \right] \left[ \int_{-\infty}^{\infty} V^*(\xi_2) d\xi_2 \right] \cdot \left[ \frac{1}{2\pi} \int_{-\infty}^{\infty} e^{-j(\xi_1 - \xi_2)x} dx \right] \right] \dots\dots\dots (15)$$

$$\frac{1}{2\pi} \int_{-\infty}^{\infty} e^{-j(\xi_1 - \xi_2)x} dx = \delta(\xi_1 - \xi_2) \dots\dots\dots (16)$$

Therefore,

$$W = \frac{1}{4\pi} \operatorname{Re} \left[ \int_{-\infty}^{\infty} P(\xi) V^*(\xi) d\xi \right] \dots\dots\dots (17)$$

Surface pressure and a Conjugate form of surface velocity in wavenumber domain are

$$P(\xi, z=0) = \frac{j\rho_o(\xi V + \omega)^2}{\sqrt{(K_o + M\xi)^2 - \xi^2}} U(\xi), \quad (18)$$

$$\Pi = \int_{\xi_1}^{\xi_2} \frac{\alpha^3 \sqrt{\alpha^2 - \xi^2} d\xi}{[(\gamma^4 \xi^4 + 2T_1 \gamma^2 \Psi \xi^2 - \alpha^2 + \Psi^2) \sqrt{\alpha^2 - \xi^2}]^2 + [2\beta \Psi \alpha \sqrt{\alpha^2 - \xi^2} + \alpha_o \alpha^2 / \gamma^2]} \quad (23)$$

Where  $\Pi$  is the nondimensional sound power obtained by multiplying the dimensional power by the factor  $4\pi\omega\rho_s A^2 / \rho_o F_o^2$ . In the integral,  $\xi_1 = -1/(1+M)$  and  $\xi_2 = 1/(1-M)$  are the shifted limits of the integration range;  $M = v/c_o$  is the Mach number of the moving force;  $\alpha = 1+M\xi$ ;  $\gamma = K_o/k_b$  is the ratio of the acoustic wavenumber to the bending wavenumber;  $k_b = (\rho_s A \omega^2 / D)^{1/4}$  is the free bending wavenumber, and  $\alpha_o = \rho_o c_1 / \rho_s A c_o \sqrt{12}$  is the fluid loading factor.  $\rho_o$  is the volume density of the air,  $c_1$  is the longitudinal wave speed of the beam material and  $\Psi$  is foundation stiffness factor.  $T_1(T/(2\sqrt{k_s D}))$  is the axial tension factor, and  $\beta = C/(2\sqrt{\rho_s A k_s})$  is foundation damping factor.

### 3. Numerical Results and Discussion

The curves presented show the variation of beam response and radiated sound power over a range of

$$V^*(\xi) = j(\xi V + \omega) U^*(\xi) \dots\dots\dots (19)$$

By substituting equation of surface pressure and conjugate velocity into a sound power spectrum, the sound power can be obtained as follows;

$$W = \frac{\rho_o}{4\pi} \operatorname{Re} \left[ \int_{-\infty}^{\infty} \frac{(\xi V + \omega^3)}{\sqrt{(K_o + M\xi)^2 - \xi^2}} |U(\xi)|^2 d\xi \right] \dots\dots\dots (20)$$

Referring to Equation (11), it is seen that the denominator of the integral in Equation (20) is real only over a restricted interval of the integration range. Specializing to the case of subsonic motion of the traveling force, the limits within which  $k_z$  is real are given by :

$$\xi_1 = \frac{-K_o}{1+M} \leq \xi \leq \frac{K_o}{1-M} = \xi_2 \dots\dots\dots (21)$$

Let  $\xi \rightarrow K_o \xi$ . (for dimensionless)

$$W = \frac{\rho_o F_o^2}{4\pi(\rho_s A)^2 \omega} \Pi \dots\dots\dots (22)$$

The nondimensional sound power radiated from the beam is given by

the various nondimensional parameters. Identifying further these parameters of passenger vehicle tires is the subject of further investigation. To investigate the effects of the stiffness factor( $\Psi$ ) and tension( $T$ ) for the radiated sound power level, the sound power was calculated as a function of the variables,  $\Psi$ , with a few different values of the force Mach number,  $M$ , and for a constant values of the wavenumber ratio,  $\gamma$ . The sound power radiated from a beam under the action of one point forces is typically represented by the curves in Figures.

The relative sound power level versus stiffness and Mach number for the air loading are shown in Figure 2. For a case of  $M=0$ , the most striking feature is relatively high radiation peaks emerge around the value of  $\Psi=1.0$  for higher frequency. This phenomenon can be called a resonance radiation. As the Mach number increase two different radiated sound power peaks are build up. For

example, if the Mach number  $M=0.5$ , one of the peaks is located in the range of  $\Psi=1.0$  and the other is in  $\Psi>1.0$ . For the higher frequency range, the sound power level is decreased if  $\Psi>1.5$  like shown in figure, while it is increasing in the range of  $\Psi>1.0$  as the driving frequency gets

lower. The figure shows that the sound power level increased effectively on the compressive forces rather than tensile forces. It is found that the forces due to the Mach number and tensile affects the location of the radiated sound power peak.

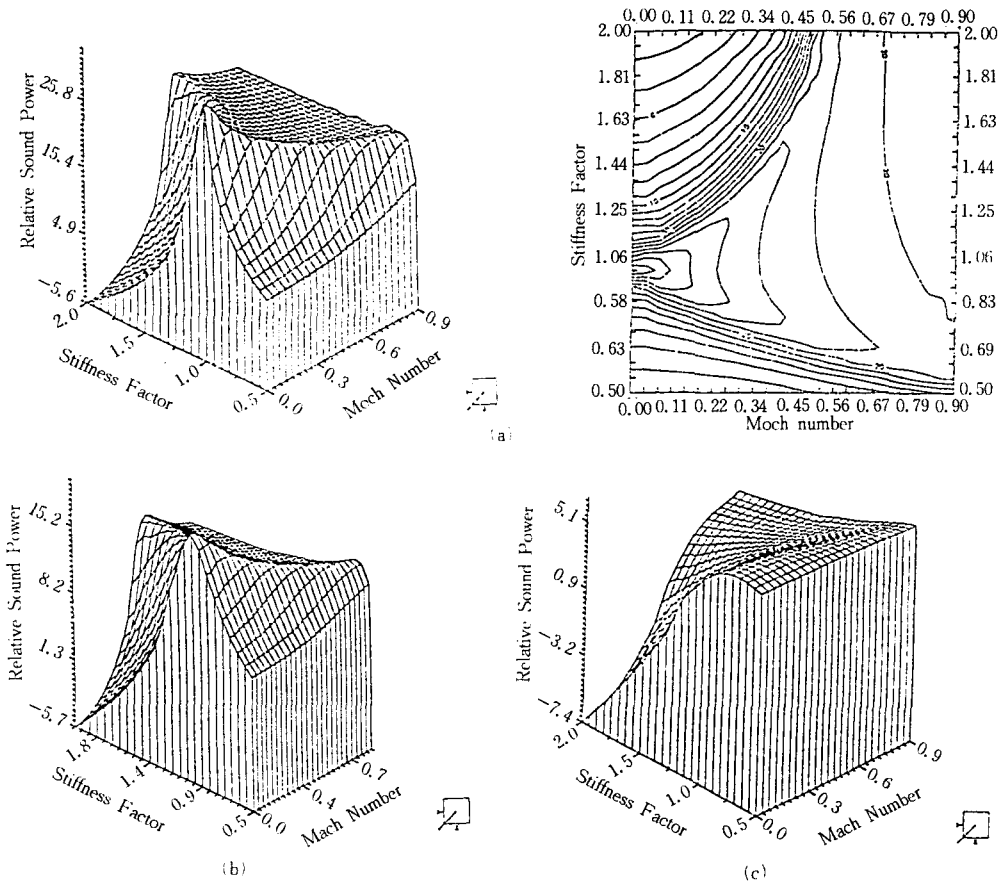


Fig. 2 Relative sound power level versus stiffness factor and mach number  
 (a)  $T_1=0.4$ ,  $\beta=0.01$ ,  $\gamma=0.2$ , (b)  $T_1=0.4$ ,  $\beta=0.1$ ,  $\gamma=0.2$ , (c)  $T_1=0.4$ ,  $\beta=0.5$ ,  $\gamma=0.2$

#### 4. Conclusion

The effects on the sound power emitted by harmonic point forces moving on infinite elastic beams are investigated and also the effects of foundation stiffness, tensin, damping and Mach number on the radiated sound power are investigated in this paper, the following conclusions can be drawn:

1) The values of stiffness factor( $\Psi$ ) give an im-

portant effect on the radiated sound power levels. For the case of  $M=0$ , A resonance radiation and a coincidence peak are produced close to the value of  $\Psi=1.0$ . This phenomenon attributed to the doppler shift effect.

- 2) When tensile force is applied, the sound power gets larger the case of compressive force is applied.
- 3) The strong coincidence radiation peak for  $M=0$

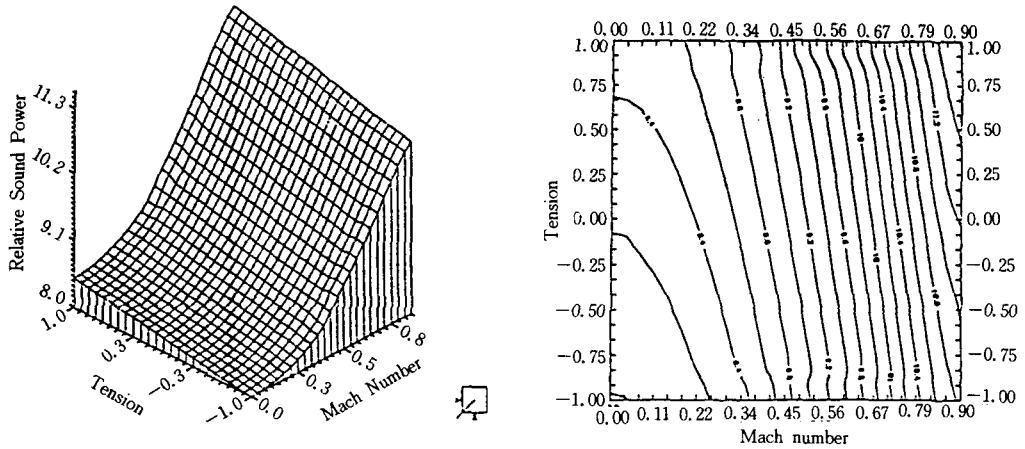


Fig. 3 Relative sound power level versus tension and mach number ( $\beta=0.1, \gamma=0.2, \psi=0.5$ )

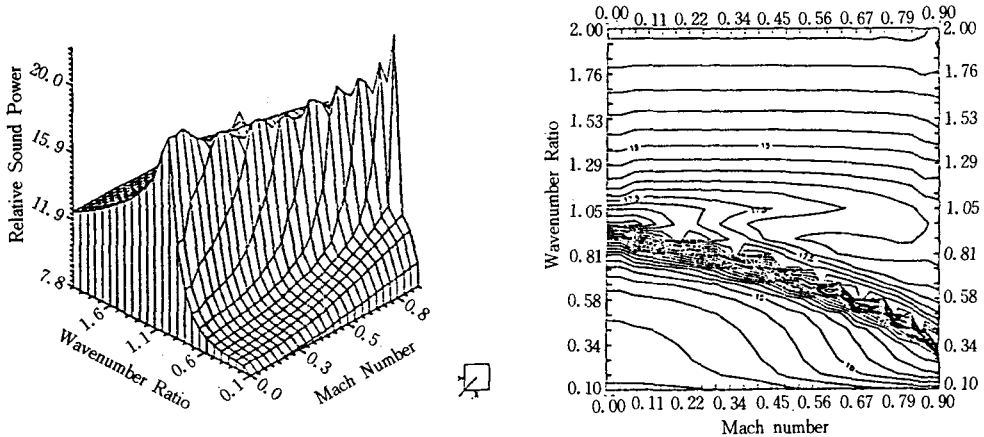


Fig. 4 Relative sound power level versus wavenumber and mach number ( $\beta=0.1, \psi=1.5, \tau_1=0.0$ )

located at  $\gamma=1.0$  and the coincidence peak changes to range of  $\gamma < 1$  accordingly as the mach number is increased. Using the expression for the radiated sound power it is possible to find parameter regions where the radiated sound power is minimized. Thus, in principle this model may form the foundation of a design guide for choosing tire parameter so as to minimize noise radiation.

### 참 고 문 헌

1) M. I. Mogilevskii, "Sound Radiation from a

Plate under the Action of Moving Harmonic Forces", *Sov. Phys. Acoust.*, Vol. 27, No. 3, pp. 250~251, 1981.

2) R. F. Keltie and H. Peng, "On the Acoustic Power Radiated by Line Forces on Elastic Beams", *J. Acoust. Soc. Am.*, Vol. 77, No. 6, pp. 2033~2038, 1985.

3) R. F. Keltie, "A Note on the Acoustic Radiation from Point-Force Elastic Beams", *J. sound. Vib.*, Vol. 92, No. 2, pp. 253~260, 1984.

4) R. F. Keltie and H. Peng, "Effects of Source Motion and Foundation Stiffness on the

- Acoustic Radiation from Submerged Structures”, Proceedings NOISE-CON88, pp. 199~204, 1988.
- 5) R. G. White., J.G.Walker., Noise and Vibration, John Wiley Sons, pp. 247~249, 1982.
  - 6) K. F. Graff., Wave Motion in Elastic Solids, Ohio State University Press, pp. 170 ~180, 1975.
  - 7) M. C. Junger., D.Feit., Sound, Structure and Their Interactions, The MIT press, pp. 235~278, 1972.
  - 8) F. Fahy., Sound and Structural Vibration (Radiation, Transmission and Response) Academic Press, pp. 90~98, 1985.