

Autonomous Navigation of an Underwater Robot in the Presence of Multiple Moving Obstacles

Kyoung-Youb Kwon and Joongseon Joh

Dept. of Control & Instrumentation Eng. Changwon National University
#9 Sarim-dong, Changwon, Kyungnam, 641-773, Korea

Abstract

Obstacle avoidance of underwater robots based on a modified virtual force field algorithm is proposed in this paper. The VFF(Virtual Force Field) algorithm, which is widely used in the field of mobile robots, is modified for application to the obstacle avoidance of underwater robots. This Modified Virtual Force Field(MVFF) algorithm using the fuzzy logic can be used in moving obstacles avoidance. A fuzzy algorithm is devised to handle various situations which can be faced during autonomous navigation of underwater robots. The proposed obstacle avoidance algorithm has ability to handle multiple moving obstacles. Results of simulation show that the proposed algorithm can be efficiently applied to obstacle avoidance of the underwater robots.

Key Words : MVFF, fuzzy logic, obstacle avoidance, track keeping, underwater robot, navigation

1. Introduction

Nowadays, as the development of ocean resources becomes very active, the demands for underwater work increase rapidly. Accordingly, underwater robots for the general inspection of ocean environment and resources emerge important subjects of research and development[1,2].

Especially, obstacle avoidance for the underwater robots is a very important subject that has to be considered in order to prevent damages to the underwater robots due to collision with the hazardous objects[3,4].

The autonomous navigation with obstacle avoiding ability is also very important subject to mobile robot researchers. One of the famous algorithms is the so-called virtual force field(VFF) algorithm. It has been applied to the mobile robots very actively and outstanding results have been reported in the literature [5-8].

The authors modified the VFF(MVFF) using the fuzzy logic in order to make the algorithm more sophisticated and applied to the autonomous navigation of a ship[9]. This paper is an extension of the MVFF to the underwater robots. The 2D problem is extended to 3D and the fuzzy logic became more sophisticated. This paper handles multiple moving obstacles.

Obstacle avoiding Navigation of underwater robots is divided into two consequent stages, which are going toward reference track and moving obstacles avoidance behaviors. The proposed algorithm modified the VFF method to provide track keeping capability in conjunction with obstacle avoidance in the presence of multiple moving obstacles intelligently. Fuzzy logic is adopted to implement expert's knowledge. Eight

linguistic variables are used in the premise part to include many cases of possible collisions.

In this paper a fuzzy logic for moving obstacles avoiding navigation of underwater robots is proposed. In section 2 of this paper we will discuss about the moving obstacles avoidance algorithm using MVFF. A fuzzy logic for moving obstacles avoidance is presented in section 3. Section 4 is the simulation results for behavior of the underwater robots.

2. Moving Obstacles Avoidance Algorithm using MVFF

The basic concept of the VFF algorithm which is applied to the mobile robots comes from the Coulomb's law. The goal attracts the mobile robot while the obstacle repels it, as in the case of electric charges [5-8]. Equation (1) shows the concept of VFF. It can be seen that it has no function of track keeping, i.e., the mobile robot just goes to the goal from the present position.

$$\vec{R} = \vec{F}_a + \vec{F}_r \quad (1)$$

where \vec{F}_a is the attractive force heading the goal, \vec{F}_r is the repulsive force against the obstacle, and \vec{R} is the resultant of all forces. The magnitude of \vec{F}_a and \vec{F}_r are constants or simple fixed functions. This algorithm works well for static obstacles. Underwater robots, however, face moving objects. Moreover, there usually exists predetermined track(usually the shortest path between neighboring points), which the underwater robot has to follow as precisely as possible for some special applications. The operation of searching the sea bottom may be the example. The original VFF algorithm, however, also fail to offer the flexibility and robustness needed to address this concern, which is important in the

Manuscript received May. 24, 2005, revised Jun. 9, 2005.

This research is financially supported by Changwon National University in 2004 and the Machine Tool Research Center at Changwon National University.

navigation of underwater robots. Consequently, we offer a modified VFF, which is capable of operating in either 'track keeping' or 'moving obstacles avoidance'.

The MVFF adds one more force vector, i.e., \vec{F}_p , to the equation (1) which plays track keeping role. Figure 1 illustrates the concept of MVFF.

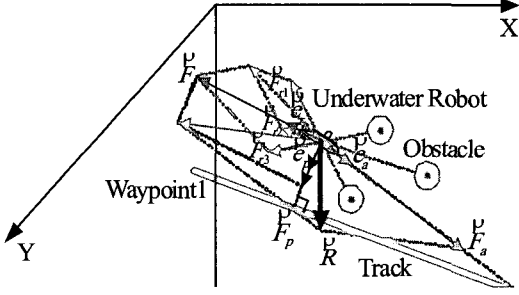


Fig. 1. The concept of MVFF.

The concept of the MVFF can be represented as

$$\vec{R} = \vec{F}_a + \vec{F}_p + \vec{F}_r = \vec{F}_a + \vec{F}_p + (\vec{F}_{r1} + \vec{F}_{r2} + \Lambda + \vec{F}_{ri}) \quad (2)$$

where

\vec{F}_a : the attractive force heading next waypoint,

\vec{F}_r, \vec{F}_{ri} : the repulsive force against obstacles, $i = 1, 2, \dots, n$.

\vec{F}_p : the perpendicular force returning to the predefined track,

\vec{R} : the resultant of all forces.

One of the novel ideas of the MVFF is in determination of the force terms in the equation (2). Equation (3) shows the way of determining the force terms in the MVFF algorithm.

$$\begin{cases} \vec{F}_a = \alpha \vec{e}_a \\ \vec{F}_p = \beta \vec{e}_p \\ \vec{F}_r = \gamma (\vec{e}_{r1} + \vec{e}_{r2} + \Lambda + \vec{e}_{ri}) \end{cases} \quad (3)$$

where \vec{e}_a is the unit vectors directed towards the next way point, \vec{e}_p is orthogonal to predefined track and is directed

towards the predefined track. $\vec{e}_{r1}, \vec{e}_{r2}$ and \vec{e}_{ri} are unit vectors directed away from the given obstacles. α, β , and γ are parameters which determine the magnitudes of each force terms. Now, sophisticated fuzzy logics determining the parameters are devised to handle various situations which can be faced during autonomous navigation of underwater robots.

Figure 2 shows the overall block diagram for the proposed algorithm. Control of underwater robots is usually carried out via a combination of inner and outer loops. The inner, course-keeping controller attempts to follow the heading angle command (ψ_d, θ_d), where ψ_d is the desired yaw, θ_d is the pitch angle. A simple PID control scheme is used for the 'course-keeping controller'. The outer, MVFF determines the

moving obstacle avoidance and track-keeping control.

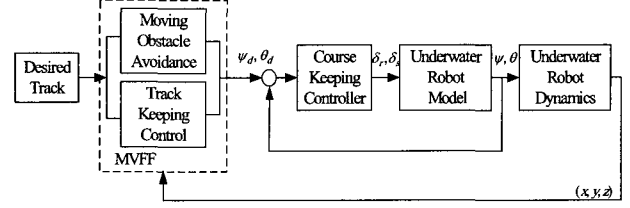


Fig. 2. Block diagram for the proposed algorithm.

It is assumed that the behavior of the underwater robot is controlled by horizontal fin(or stern plane) and vertical fin(or rudder plane). The two fins operate independently of each other. In this paper, the authors designed a simple submarine-type underwater robot just mathematically for this research using the reference[10-12], so the dynamic behavior may not be good. It was enough, however, for this research since the purpose of the research was the feasibility study of the proposed algorithm.

3. Fuzzy Logic for Moving Obstacle Avoidance

In this paper, the gains α, β , and γ for vector \vec{F}_a, \vec{F}_p , and \vec{F}_r are obtained from the fuzzy logic. These algorithms have the ability to handle track keeping and moving obstacle avoidance in various obstacles environment.

Properly designed set of fuzzy rules for α and β provides efficient track keeping of the underwater robot to the desired track from its deviated location.

Figure 3 represents the term set for the linguistic variable d_a . It consists of {Z(ero), S(mall), B(ig)}. Figure 4 represents the term set for the linguistic variable v_a . It consists of {S(mall), M(edium), B(ig)}. Figure 5 represents the term set for the linguistic variable α . It consists of {Z(ero), S(mall), B(ig)}. Table I shows rule table for α . The universe of discourse is represented normalization. This means that if d_a is small then α is big, if d_a is big then α is small regardless of velocity. It is applied to identical term set and fuzzy rule in horizontal plane control and vertical plane control. It is a different scaling factor.

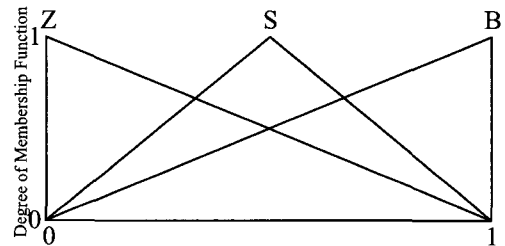


Fig. 3. Term set for d_a

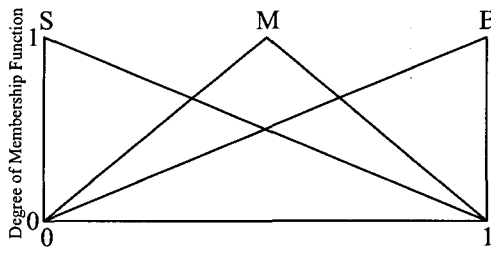


Fig. 4. Term set for v_α

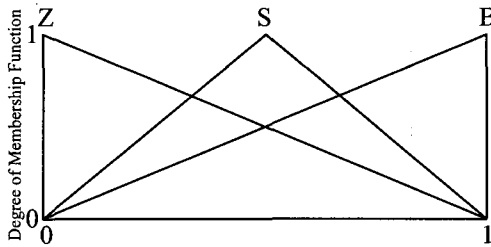


Fig. 5. Term set for α

TABLE I. Rule table for α

$d_\alpha \setminus v_\alpha$	S	M	B
Z	B	B	B
S	S	S	S
B	Z	Z	Z

β consists of the shortest distance between the underwater robot and predetermined track (e_β) and its rate (Δe_β). The purpose of this fuzzy rule is to reduce oscillation and return reference track.

Figure 6 represents the term set for the linguistic variable e_β . It consists of {N(egative), Z(ero), P(ositive)}. Figure 7 represents the term set for the linguistic variable Δe_β . It consists of {N(egative), Z(ero), P(ositive)}. Figure 8 represents the term set for the linguistic variable β . Table II shows rule table for β . Table II illustrates the fuzzy rule about regulation problem.

Basically, the VFF algorithm yields good obstacle avoidance performance, particularly for static obstacles. However, collision situations for underwater robots are generally complicated. The original VFF algorithm is not so flexible to handle these complicated situations. In this paper, space allocation between underwater robot and obstacle are constructed. These are solved by fuzzy logics.

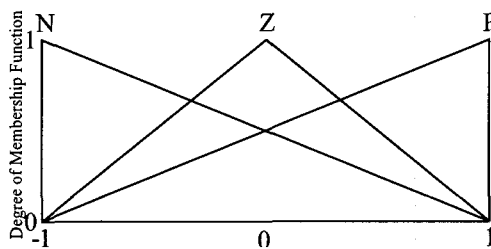


Fig. 6. Term set for e_β and Δe_β


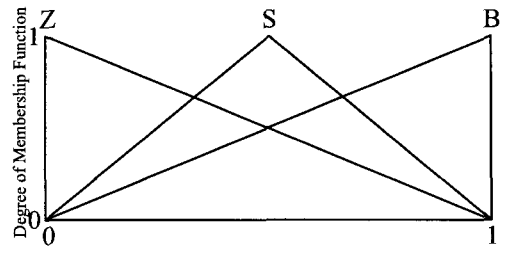


Fig. 7. Term set for β

TABLE II. Rule table for β

$e_\beta \setminus \Delta e_\beta$	N	Z	B
N	B	S	Z
Z	S	Z	S
B	Z	B	B


Figure 8 shows the space surrounding a underwater robot. Representative locations of possible moving obstacles are marked as circle. Fuzzy rules for collision avoidance are designed for these locations. The front half of the space to which the underwater robot advances is divided more precisely than the rear half space. Fuzzy rules for the divided sectors are designed carefully and these rules are blended using fuzzy inference in order to cover all the space smoothly.

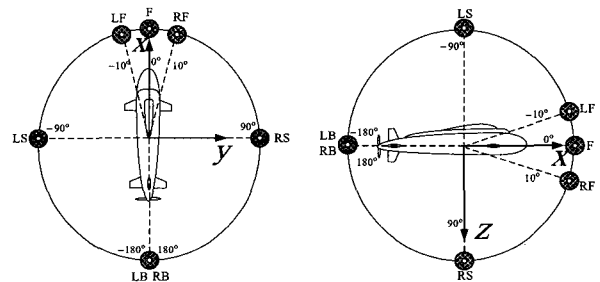

(a) xy -plane (b) xz -plane

Fig. 8. Representative locations of obstacles.

Figure 9 shows the meaning of premise part term set for γ . The obstacles can be dynamic. The direction of the moving obstacles can be toward or outward the underwater robot. So, a lot of possible situations should be considered in these fuzzy rules. The original VFF is not so flexible to handle these complicated situations. The proposed MVFF algorithm introduces the concept of the vector of obstacle avoidance \vec{F}_r . It is illustrated in the Figure 1. This vector is determined via fuzzy rules which have eight linguistic variables.

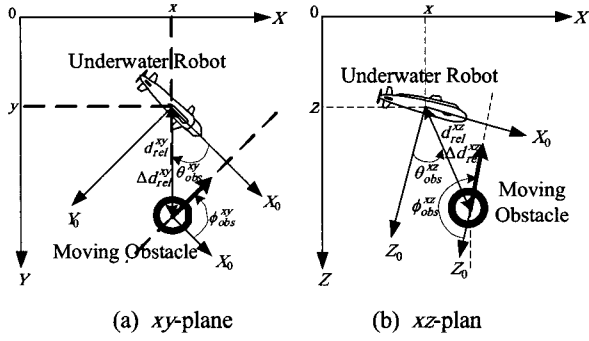
 Fig. 9. Meaning of premise part term set for γ .

Equation (4) represents the i th generic fuzzy rule yielding γ . It can be applied to horizontal control and vertical control.

$$\begin{aligned} \text{IF } d_{rel} \text{ is } (LVd_{rel})_i \text{ and } \Delta d_{rel} \text{ is } (LV\Delta d_{rel})_i \\ \text{and } \theta_{obs} \text{ is } (LV\theta_{obs})_i \text{ and } \varphi_{obs} \text{ is } (LV\varphi_{obs})_i \\ \text{THEN } \gamma \text{ is } (LV\gamma)_i \end{aligned} \quad (4)$$

where LV is a linguistic value of the linguistic variable, d_{rel} is the distance between the underwater robot and the obstacle, Δd_{rel} is the rate of d_{rel} , θ_{obs} is the location of the obstacle with respect to the underwater robot, φ_{obs} is the moving direction of the obstacle measured with respect to the local coordinate system attached to the underwater robot.

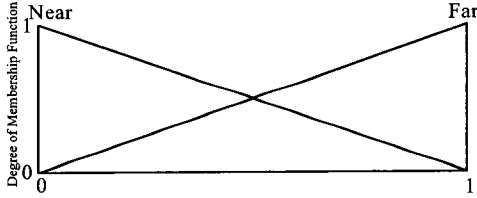
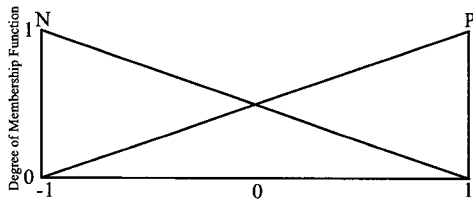
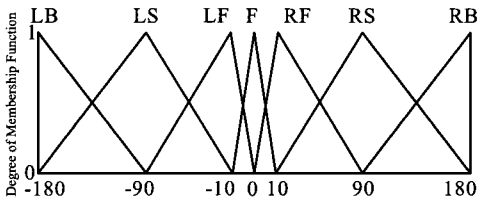
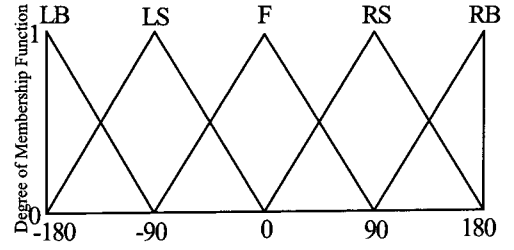
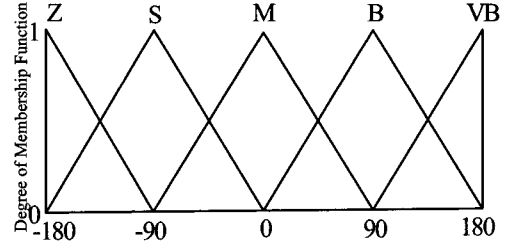

 Fig. 10. Term set for d_{rel}

 Fig. 11. Term set for Δd_{rel}

 Fig. 12. Term set for θ_{obs}

 Fig. 13. Term set for ϕ_{obs}

 Fig. 14. Term set for γ

 TABLE III. Rule table for γ

IF d_{rel} is *Near* and Δd_{rel} is *N*,

ϕ_{obs} \ θ_{obs}	LB	LS	LF	F	RF	RS	RB
LB	Z	M	M	VB	M	M	Z
LS	S	S	S	B	VB	VB	S
F	M	B	B	M	B	B	M
RS	S	VB	VB	B	S	S	S
RB	Z	M	M	VB	M	M	Z

IF d_{rel} is *Near* and Δd_{rel} is *P*,

ϕ_{obs} \ θ_{obs}	LB	LS	LF	F	RF	RS	RB
LB	Z	S	S	B	S	S	Z
LS	Z	Z	Z	M	B	B	Z
F	S	M	M	S	M	M	S
RS	Z	B	B	M	Z	Z	Z
RB	Z	S	S	B	S	S	Z

IF d_{rel} is *Far* and Δd_{rel} is *N*,

ϕ_{obs} \ θ_{obs}	LB	LS	LF	F	RF	RS	RB
LB	Z	Z	Z	M	Z	Z	Z
LS	Z	Z	Z	S	M	M	Z
F	Z	S	S	Z	S	S	Z
RS	Z	M	M	S	Z	Z	Z
RB	Z	Z	Z	M	Z	Z	Z

IF d_{rel} is *Far* and $\triangle d_{rel}$ is *P*,

ϕ_{obs} θ_{obs}	LB	LS	LF	F	RF	RS	RB
LB	Z	Z	Z	S	Z	Z	Z
LS	Z	Z	Z	Z	S	S	Z
F	Z	Z	Z	Z	Z	Z	Z
RS	Z	S	S	Z	Z	Z	Z
RB	Z	Z	Z	S	Z	Z	Z

The term sets of the four linguistic variables are illustrated in the figure 10 ~ 13. Figure 10 represents the term set for the linguistic variable. It consists of {Near, Far}. Figure 11 represents the term set for the linguistic variable. It consists of {N(egative), P(ositive)}. Figure 12 represents the term set for the linguistic variable θ_{obs} . It consists of {LB, LS, LF, F, RF, RS, RB}. L and B denotes 'Left', and 'Right'. B, S, and F mean 'Backside', 'Side', and 'Front', respectively. Figure 13 represents the term set for the linguistic variables ϕ_{obs} . It consists of {LB, LS, F, RS, RB}. Figure 14 shows the term set of consequent part. It consists of {Z(ero), S(mall), M(edium), B(ig) V(ery)B(ig)}.

The resulting combinations of linguistic variables and their associated term sets result in 280 fuzzy rules as listed in Table III. Fuzzy rules are obtained by designer's intuition and trial and error method.

The proposed algorithm in this paper is able to set the obstacle avoiding distance r (Refer to Fig.8 and Fig. 9). The position of the underwater robot is the center of the circle of radius r and the circle plays the role of the onset of the obstacle avoidance action. This means that the algorithm ignores obstacles outside the circle but it activates its obstacle avoiding action whenever the obstacles are inside the circle. The radius x can be set by the operator appropriately. Therefore, with the assumption of no existence of obstacles within the circle at the onset of the obstacle avoiding algorithm, the collision can always be avoided.

4. Simulations

In this paper, an extensive simulation study is performed to verify the validity of the proposed algorithm. This model is cited from [10-12]. It is assumed that the underwater robot is following the predefined track which is made by connecting two adjacent waypoints. Multiple moving obstacles are placed around the track. It is also assumed that the real time position of the obstacles can be sensed. The angle and rate of the rudder and stern is limited as $-23 \sim 23$ degrees and $-10 \sim 10$ degree/s for simulation. The radius of the obstacle avoiding circle of underwater robot and obstacle are 20meters and 60meters. The surge velocity of underwater robot is 3meter/s.

Waypoints used are as follows,

Waypoint1: $x = 100m, y = -100m, z = -100m$

Waypoint2: $x = 500m, y = -500m, z = -500m$

and these marked as small circles. PID-controller for rudder with gain $K_{pDR} = -1.3, K_{dDR} = -2.7$ and $K_{iDR} = -0.0001$ is used as a course-keeping controller for all the simulations. PID-controller for stern with gain $K_{pDS} = -7, K_{dDS} = -4.3$ and $K_{iDS} = -0.013$ is used as a course-keeping controller for all the simulations. Where, K_{pDR}, K_{pDS} denote P gain values. K_{dDR}, K_{dDS} denote D gain values. K_{iDR}, K_{iDS} denote I gain values.

In this paper, We compared the MVFF using fuzzy logic with constant and fixed equation at track-keeping and obstacle avoidance. In figure 15, the location of underwater robot is set to $x = 120m, y = -150m, z = -120m$. The location of obstacle is set to $x = 300m, y = -300m, z = -300m$. The radius of the obstacle avoiding is marked as black circle.

Figure 15 shows the ability of the MVFF algorithm from the view point of track keeping accuracy over the so-called VFF algorithm which has been used widely in the field of obstacle avoidance of mobile robots. It can be seen easily that the well-designed MVFF outperforms the conventional VFF algorithm.

In figure 16, the location of underwater robot is set to $x = 120m, y = -150m, z = -120m$. The location of first moving obstacle is set to $x = 300m, y = -327m, z = -310m$. The velocity of first moving obstacle is set to $v_{obsz} = -2.5m/s, v_{obsy} = 1m/s, v_{obsx} = 2m/s$. The location of second moving obstacle is set to $x = 300m, y = -327m, z = -310m$. The velocity of second moving obstacle is set to $v_{obsz} = -0.6m/s, v_{obsy} = 2m/s, v_{obsx} = 1.2m/s$.

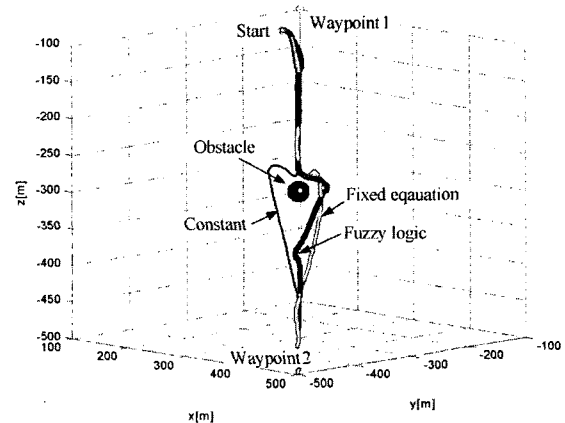


Fig. 15. Performance comparison of the MVFF and VFF algorithms.

Small circle and big circle is represented the radius of the underwater robot and the obstacle, respectively. The solid line shows the track-keeping and the circle shows the moving obstacle avoidance.

Figure 16 illustrates the ability of the MVFF algorithm in avoiding multiple moving obstacles. It shows the proposed algorithm avoids two moving obstacles nicely while keeping the predetermined track as close as possible.

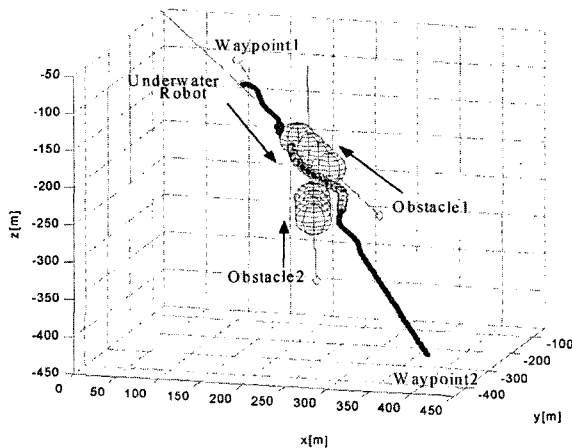


Fig. 16. Obstacles avoidance of the MVFF algorithm in presence of two moving obstacles

5. Conclusions

An algorithm for moving obstacle avoiding autonomous navigation of underwater robots is proposed in this paper. The MVFF (Modified Virtual Force Field) algorithm is newly devised to yield the track keeping and moving obstacle avoidance.

The novel idea of using three parameters α , β , and γ with sophisticated fuzzy logic provides great flexibility in handling more complicated situations of autonomous navigation of underwater robots. Multiple moving obstacles can be avoided with the proposed algorithm. The complete system involves two hundreds and eight fuzzy rules with eight linguistic variables in the premise part, which presents a certain challenge from a computational standpoint. Various simulation results are presented to verify the validity of the proposed algorithm.

References

- [1] Jeen-Shing Wang; Lee, C.S.G., "Self-adaptive recurrent neuro-fuzzy control of an autonomous underwater vehicle Robotics and Automation", *IEEE Transactions on*, 19, Issue. 2, pp. 283-295, April 2003.
- [2] Ishii, K., Nishida, S., Watanabe, K., Ura, T., "A collision avoidance system based on self-organizing map and its application to an underwater vehicle Control", *Automation, Robotics and Vision, 2002. ICARCV 2002. 7th International Conference on*, 2, Dec. 2002.
- [3] Sayyaadi, H., Ura, T., Fujii, T., "Collision avoidance controller for AUV systems using stochastic real value reinforcement learning method", *Proceedings of the 39th SICE Annual Conference. International Session Papers*, pp.165-170, 26-28 July 2000.
- [4] Xuemin Liu, Liang Peng, Jiawei Li, Yuru Xu, "Obstacle avoidance using fuzzy neural networks

Underwater Technology", *Proceedings of the 1998 International Symposium on*, pp. 282-286, 15-17 April 1998.

- [5] A. A. Masoud and M. M. Bayoumi, "Robot navigation using the vector potential approach", *Proc. of IEEE international Conference on Robotics and Automation*, vol. 1, pp. 805-811, 1993.
- [6] Kwang-Young Im, Se-Young Oh, "An extended virtual force field based behavioral fusion with neural networks and evolutionary programming for mobile robot navigation", *Evolutionary Computation, 2000, Proceedings of the 2000 Congress on*, 2, pp. 1238-1244, 16-19 July 2000.
- [7] Kwang-Young Im, Se-Young Oh, Seong-Joo Han, "Evolving a modular neural network-based behavioral fusion using extended VFF and environment classification for mobile robot navigation Evolutionary Computation", *IEEE Transactions on*, 4, pp. 413-419, Aug. 2002.
- [8] J. Borenstein, "Real-time obstacle avoidance for fast mobile robot", *IEEE Transactions on Systems, Man and Cybernetics*, Vol. 19, No. 5, pp. 1179-1187, Sept./Oct., 1989.
- [9] Joongseon Joh, Kyung-Yup Kwon and Sang-Min Lee, "Collision Avoiding Navigation of Marine Vehicles Using Fuzzy Logic", *International Journal of Fuzzy Logic and Intelligent Systems*, Vol. 2, No. 2, pp. 100-108, June 2002.
- [10] Donald P. Brutzman, "A Virtual World for an Autonomous Underwater Vehicle", *Dissertation, Naval Postgraduate school, Monterey California*, 1994.
- [11] T. I. . *Guidance and Control of Ocean Vehicles*, John Wiley & Sons Ltd, Chichester, 1994.
- [12] A. J. Healey, and D. Lienard, "Multivariable sliding mode control of autonomous diving and steering of underwater vehicles," *IEEE Journal of Ocean Engineering*, OE-18, 3, pp.327-339, 1993.



Kyoung-Youb Kwon received the M.S. degree in Department of Control and Instrumentation Engineering from Changwon National University, Changwon, Korea, in 2001. He is currently pursuing the Ph.D. degree. His research interests include intelligent systems, fuzzy control and application engineering, etc.

Phone : +82-55-285-7550

Fax : +82-55-262-5064

E-mail : kykwon@changwon.ac.kr



Joongseon Joh (M'95) was born in Hong-Sung, Korea. He received the B.S. degree in Mechanical Engineering from the Inha University, Korea, in 1981, the M.S. degree in Mechanical Design and Production Engineering from the Seoul National University, Korea, in 1983, and the Ph.D. degree in Mechanical Engineering from the Georgia Institute of Technology in 1991. From 1983~1986, he was with the central research center of Daewoo Heavy Industries. He was also with the Agency for Defense Development from 1991~1993. Since 1993, he has been with the Department of Control and Instrumentation Engineering, Changwon National University, where he is now a Professor. He received the outstanding paper award from the Trans. on Fuzzy Systems, IEEE at 2001. His research interests include intelligent control, development of DSP-based controllers for servo systems using BLDC motors, and the design and control of MR fluid based mechanical systems.

Phone : +82-55-279-7555

Fax : +82-55-262-5064

E-mail : jsjoh@sarim.changwon.ac.kr