

Hall Effect on Couette Flow with Heat Transfer of a Dusty Conducting Fluid Between Parallel Porous Plates Under Exponential Decaying Pressure Gradient

Hazem A. Attia*

*Department of Mathematics, College of Science, Al-Qasseem University,
P.O. Box 237, Buraidah 81999, Saudi Arabia*

*On leave from : Department of Engineering Mathematics and physics, Fac. of Engineering,
El-Fayoum University, El-Fayoum, Egypt*

In the present study, the unsteady Couette flow with heat transfer of a dusty viscous incompressible electrically conducting fluid under the influence of an exponential decaying pressure gradient is studied without neglecting the Hall effect. The parallel plates are assumed to be porous and subjected to a uniform suction from above and injection from below while the fluid is acted upon by an external uniform magnetic field is applied perpendicular to the plates. The governing equations are solved numerically using finite differences to yield the velocity and temperature distributions for both the fluid and dust particles.

Key Words : Fluid Mechanics, Hydromagnetic Flow, Hall effect, Two Phase Flow, Couette Flow, Heat Transfer, Finite Differences

1. Introduction

The importance and application of solid/fluid flows and heat transfer in petroleum transport, wastewater treatment, combustion, power plant piping, corrosive particles in engine oil flow, and many others are well known in the literature. Particularly, the flow and heat transfer of electrically conducting fluids in channels and circular pipes under the effect of a transverse magnetic field occurs in magnetohydrodynamic (MHD) generators, pumps, accelerators, and flow meters and has possible applications in nuclear reactors, filtration, geothermal systems, and others. The possible presence of solid particles such as ash or

soot in combustion MHD generators and plasma MHD accelerators and their effect on the performance of such devices led to studies of particulate suspensions in conducting fluids in the presence of magnetic fields. For example, in an MHD generator, coal mixed with seed is fed into a combustor. The coal and seed mixture is burned in oxygen and the combustion gas expands through a nozzle before it enters the generator section. The gas mixture flowing through the MHD channel consists of a condensable vapor (slag) and a non-condensable gas mixed with seeded coal combustion products. Both the slag and the non-condensable gas are electrically conducting (Lohrabi, 1980; Chamkha, 2000). The presence of the slag and the seeded particles significantly influences the flow and heat transfer characteristics in the MHD channel. Ignoring the effect of the slag, and considering the MHD generator start-up condition, the problem reduces to unsteady two-phase flow in an MHD channel.

The hydrodynamic flow of dusty fluids was studied by a number of authors (Saffman, 1962 ;

* Corresponding Author,

E-mail : ah1113@yahoo.com

TEL : +00966-6-3826928; FAX : +00966-6-3800911

Department of Mathematics, College of Science, Al-Qasseem University, P.O. Box 237, Buraidah 81999, Saudi Arabia, On leave from : Department of Engineering Mathematics and physics, Fac. of Engineering, El-Fayoum University, El-Fayoum, Egypt. (Manuscript

Received November 9, 2005; Revised February 6, 2006)

Gupta et al., 1976 ; Prasad et al., 1979 ; Dixit, 1980 ; Ghosh et al., 1984). Later the hydromagnetic flow of dusty fluids was studied (Singh, 1976 ; Mitra et al., 1981 ; Borkakotia et al., 1983 ; Megahed et al., 1988 ; Aboul-Hassan et al., 1991 ; Attia, 2005). In the above mentioned work the Hall term was ignored in applying Ohm's law, as they have no marked effect for small and moderate values of the magnetic field. However, the current trend for the application of magnetohydrodynamics is towards a strong magnetic field, so that the influence of electromagnetic force is noticeable under these conditions, and the Hall current is important and it has a marked effect on the magnitude and direction of the current density and consequently on the magnetic force term (Crammer et al., 1973). The effect of the Hall current on the Hartmann flow of a clean fluid was studied by a number of authors (Sutton et al., 1965 ; Soundalgekar et al., 1979 ; 1986 ; Attia, 1998 ; 2002). Aboul-Hassan and Attia (2002) studied the influence of the Hall current on the flow and heat transfer of a dusty conducting fluid in a rectangular channel under a constant pressure gradient.

In the present work, the unsteady Couette flow with heat transfer of an electrically conducting, viscous, incompressible, dusty fluid is studied with the consideration of the Hall current. The fluid is assumed to be incompressible and electrically conducting and the particle phase is assumed to be incompressible, electrically non-conducting dusty and pressureless. The upper plate is moving with a constant velocity while the lower plate is kept stationary. The fluid is flowing between two infinite electrically insulating porous plates maintained at two constant but different temperatures while the particle phase is assumed to be electrically non-conducting. The fluid is subjected to a uniform suction from above and a uniform injection from below and mass conservation is assumed. An external uniform magnetic field is applied perpendicular to the plates while no electric field is applied and the induced magnetic field is neglected by assuming a very small magnetic Reynolds number. The fluid is acted upon by an exponential decaying pressure gradi-

ent. The governing equations are solved numerically using the finite difference approximations to obtain the temperature distributions for both the fluid and dust particles. The effect of the magnetic field, the Hall current and the suction velocity on both the velocity and temperature fields of the fluid and dust particles are reported.

2. Description of the Problem

The dusty fluid, is assumed to be flowing between two infinite horizontal porous plates located at the $y = \pm h$ planes and extend from $x = -\infty$ to ∞ and from $z = -\infty$ to ∞ . The upper plate is moving with a constant velocity U_0 while the lower plate is kept stationary. The plates are subjected to a uniform suction from above and a uniform injection from below. Thus the y -component of the velocity of the fluid is constant and denoted by v_0 . The dust particles are assumed to be electrically non-conducting spherical in shape and uniformly distributed throughout the fluid and to be big enough, so that they are not pumped out through the porous plates and have no y -component of velocity. The two plates are assumed to be electrically non-conducting and kept at two constant temperatures T_1 for the lower plate and T_2 for the upper plate with $T_2 > T_1$. A uniform pressure gradient, which is taken to be exponentially decaying with time, is applied in the x -direction. A uniform magnetic field B_0 is applied in the positive y -direction. This is the only magnetic field in the problem as the induced magnetic field is neglected by assuming a very small magnetic Reynolds number (Crammer et al., 1973). It is required to obtain the time varying velocity and temperature distributions for both fluid and dust particles. Due to the inclusion of the Hall current term, a z -component of the velocities of the fluid and of dust particles is expected to arise. Since the plates are infinite in the x and z -directions, the physical quantities are independent of the x or z coordinates and consequently, they do not change in these directions and consequently the problem is essentially one-dimensional. The governing equations for this study are based on the conservation laws of mass,

linear momentum and energy of both phases.

3. The Velocity Distribution

The flow of fluid is governed by the momentum equation

$$\rho \frac{D\vec{v}}{Dt} = -\vec{\nabla}P + \mu \nabla^2 \vec{v} + \vec{J} \times \vec{B}_o - KN(\vec{v} - \vec{v}_p) \quad (1)$$

where ρ is the density of clean fluid, μ is the viscosity of clean fluid, \vec{v} is the velocity of the fluid, $\vec{v} = u(y, t)\vec{i} + v_o\vec{j} + w(y, t)\vec{k}$, \vec{v}_p is the velocity of dust particles, $\vec{v}_p = u_p(y, t)\vec{i} + w_p(y, t)\vec{k}$, \vec{J} is the current density, N is the number of dust particles per unit volume, K is the Stokes constant $= 6\pi\mu a$, and a is the average radius of dust particles.

The first three terms in the right-hand side of Eq. (1) are, respectively, the pressure gradient, viscosity, and Lorentz force terms. The last term represents the force due to the relative motion between fluid and dust particles. It is assumed that the Reynolds number of relative velocity is small. In such a case the force between dust and fluid is proportional to the relative velocity (Saffman, 1962). If the Hall term is retained, the current density \vec{J} from the generalized Ohm's law is given by (Crammer et al., 1973; Sutton et al., 1965);

$$\vec{J} = \sigma[\vec{E} + \vec{V} \wedge \vec{B}_o - \beta(\vec{J} \wedge \vec{B}_o)] \quad (2)$$

where σ is the electric conductivity of the fluid, and β is the Hall factor (Crammer et al., 1973; Sutton et al., 1965). Solving Eq. (2) for \vec{J} gives

$$\vec{J} \wedge \vec{B}_o = \frac{\sigma B_o^2}{1+m^2} [(u+mw)\vec{i} + (w-mu)\vec{k}] \quad (3)$$

where $m = \sigma\beta B_o$, is the Hall parameter (Crammer et al., 1973; Sutton et al., 1965). Thus, in terms of Eq. (3), the two components of Eq. (1) read

$$\rho \frac{\partial u}{\partial t} + \rho v_o \frac{\partial u}{\partial y} = -\frac{dP}{dx} + \mu \frac{\partial^2 u}{\partial y^2} - \frac{\sigma B_o^2}{1+m^2} (u+mw) - KN(u-u_p) \quad (4)$$

$$\rho \frac{\partial w}{\partial t} + \rho v_o \frac{\partial w}{\partial y} = \mu \frac{\partial^2 w}{\partial y^2} - \frac{\sigma B_o^2}{1+m^2} (w-mu) - KN(w-w_p) \quad (5)$$

The motion of the dust particles is governed by Newton's second law applied in the x and z -directions

$$m_p \frac{\partial u_p}{\partial t} = KN(u-u_p) \quad (6)$$

$$m_p \frac{\partial w_p}{\partial t} = KN(w-w_p) \quad (7)$$

where m_p is the average mass of dust particles. If dust particles are big in size, there will be accumulation of particles near the upper plate and N becomes a function of y . Due to the non-uniformity of particle density, diffusion effects arise, which tends to push particles downwards with force which balances the upward friction force with the fluid molecules. The y -component of the momentum equation of dust particles reads

$$\bar{\mu} KN v_o = -D \frac{dN}{dy}$$

where Kv_o is the drag force per particle, $\bar{\mu}$ and D are the mobility and diffusion coefficient for dust particles. This equation has the solution

$$N = N_o e^{-\gamma y}$$

where the constant $\gamma = \mu K v_o / D$. N_o is related to the average density N_A of dust particles by

$$N_A = \frac{1}{2h} \int_{-h}^h N_o e^{-\gamma y} dy = \frac{N_o \sinh \gamma h}{\gamma h}$$

If γh is much less than unity then, as a first order approximation, one can take $N = N_A$ throughout the analysis.

It is assumed that the pressure gradient is applied at $t=0$ and the fluid starts its motion from rest. Thus,

$$t \leq 0 : u = u_p = w = w_p = 0 \quad (8a)$$

For $t > 0$, the no-slip condition at the plates implies that

$$t > 0, y = -h : u = u_p = w = w_p = 0 \quad (8b)$$

$$t > 0, y = h : u = U_o, u_p = w = w_p = 0 \quad (8c)$$

4. The Temperature Distribution

Heat transfer takes place from the upper hot plate to the lower cold plate by conduction through the fluid. Since the hot plate is above,

there is no natural convection, however, there is a forced convection due to the suction and injection. In addition to the heat transfer, there is a heat generation due to both the Joule and viscous dissipations. The dust particles gain heat from the fluid by conduction through their spherical surface. Since, the problem deals with a two-phase flow, two energy equations are required (Crammer et al., 1973; Schlichting, 1968). The energy equations describing the temperature distributions for both the fluid and dust particles read

$$\rho c \frac{\partial T}{\partial t} + \rho c v_o \frac{\partial T}{\partial y} = k \frac{\partial^2 T}{\partial y^2} + \mu \left[\left(\frac{\partial u}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial y} \right)^2 \right] + \frac{\sigma B_o^2}{1+m^2} (u^2 + w^2) + \frac{\rho_p c_s}{\gamma_T} (T_p - T) \quad (9)$$

$$\frac{\partial T_p}{\partial t} = -\frac{1}{\gamma_T} (T_p - T) \quad (10)$$

where T is the temperature of the fluid, T_p is the temperature of the particles, c is the specific heat capacity of the fluid at constant volume, k is the thermal conductivity of the fluid, ρ_p is the mass of dust particles per unit volume of the fluid, γ_T is the temperature relaxation time, and c_s is the specific heat capacity of the particles.

The last three terms on the right-hand side of Eq. (9) represent the viscous dissipation, the Joule dissipation (j^2/σ), and the heat conduction between the fluid and dust particles respectively. The temperature relaxation time depends, in general, on the geometry, and since the dust particles are assumed to be spherical in shape, the last term in Eq. (9) is equal to $4\pi a N k (T_p - T)$. Hence

$$\gamma_T = \frac{3Pr \gamma_p c_s}{2c}$$

where γ_p is the velocity relaxation time $= 2\rho_s a^2/9\mu$, Pr is the Prandtl number $= \mu c/k$, and ρ_s is the material density of dust particles $= 3\rho_p/4\pi a^3 N_A$.

T and T_p must satisfy the initial and boundary conditions

$$t \leq 0 : T = T_p = T_1 \quad (11a)$$

$$t > 0, y = -h : T = T_p = T_1 \quad (11b)$$

$$t > 0, y = h : T = T_p = T_2 \quad (11c)$$

Equations (4)-(11) can be made dimensionless by introducing the following dimensionless variables and parameters

$$(\hat{x}, \hat{y}) = \frac{(x, y)}{h}, \quad \hat{t} = \frac{t U_o}{h}, \quad (\hat{u}, \hat{w}) = \frac{(u, w)}{U_o},$$

$$(\hat{u}_p, \hat{w}_p) = \frac{(u_p, w_p)}{U_o}, \quad \hat{P} = \frac{P}{\rho U_o^2},$$

$$\hat{T} = \frac{T - T_1}{T_2 - T_1}, \quad \hat{T}_p = \frac{T_p - T_1}{T_2 - T_1}$$

$S = v_o/U_o$, the suction parameter,

$Re = U_o \rho h / \mu$, is the Reynolds number,

$Ha = B_o h \sqrt{\sigma/\mu}$, the Hartmann number,

$Ec = U_o^2/c(T_2 - T_1)$, the Eckert number,

$G = m_p \mu / \rho h^2 K$, is the particle mass parameter,

$R = KN_A h^2 / \mu$, is the particle concentration parameter,

$L_o = \rho h^2 / \mu \gamma_T$, is the temperature relaxation time parameter.

In terms of the above non-dimensional quantities Eqs. (4)-(11) read (the hats are dropped for convenience)

$$\frac{\partial u}{\partial t} + S \frac{\partial u}{\partial y} = -\frac{1}{Re} \frac{dP}{dx} + \frac{1}{Re} \frac{\partial^2 u}{\partial y^2} - \frac{Ha^2}{Re(1+m^2)} (u + mw) - \frac{R}{Re} (u - u_p) \quad (12)$$

$$\frac{\partial w}{\partial t} + S \frac{\partial w}{\partial y} = \frac{1}{Re} \frac{\partial^2 w}{\partial y^2} - \frac{Ha^2}{Re(1+m^2)} (w - mu) - \frac{R}{Re} (w - w_p) \quad (13)$$

$$G \frac{\partial u_p}{\partial t} = u - u_p \quad (14)$$

$$G \frac{\partial w_p}{\partial t} = w - w_p \quad (15)$$

$$t \leq 0 : u = u_p = w = w_p = 0 \quad (16a)$$

$$t > 0, y = -h : u = u_p = w = w_p = 0 \quad (16b)$$

$$h > 0, y = h : u = 1, u_p = w = w_p = 0 \quad (16c)$$

$$\frac{\partial T}{\partial t} + S \frac{\partial T}{\partial y} = \frac{1}{RePr} \frac{\partial^2 T}{\partial y^2} + \frac{Ec}{Re} \left[\left(\frac{\partial u}{\partial y} \right)^2 + \left(\frac{\partial w}{\partial y} \right)^2 \right] + \frac{Ha^2 Ec}{Re(1+m^2)} (u^2 + w^2) + \frac{2R}{3Pr} (T_p - T) \quad (17)$$

$$\frac{\partial T_p}{\partial t} = -L_o (T_p - T) \quad (18)$$

$$t \leq 0 : T = T_p = 0 \quad (19a)$$

$$t > 0, y = -1 : T = T_p = 0 \quad (19b)$$

$$t > 0, y = 1 : T = T_p = 1 \quad (19c)$$

where the pressure gradient is assumed in the form $dP/dx=Ce^{-at}$.

Equations (12)-(19) represent a system of partial differential equations which is solved numerically using the finite difference approximation. The Crank-Nicolson implicit method (Ames, 1977) is used at two successive time levels. Finite difference equations relating the variables are obtained by writing the equations at the mid point of the computational cell and then replacing the different terms by their second order central difference approximation in the y -direction. The

diffusion terms are replaced by the average of the central differences at two successive time-levels. Finally, the resulting block tri-diagonal system is solved using the generalized Thomas-algorithm (Ames, 1977). The computational domain is divided into meshes each of dimension Δt and Δy in time and space, respectively. We define the variables $A=\partial u/\partial y$, $B=\partial w/\partial y$ and $H=\partial T/\partial y$ to reduce the second order differential Eqs. (12)-(15) and (17) to first order differential equations. The finite difference representations for the resulting first order differential take the form

$$\begin{aligned} & \left(\frac{u_{i+1,j+1}-u_{i,j+1}+u_{i+1,j}-u_{i,j}}{2\Delta t} \right) + S \left(\frac{A_{i+1,j+1}+A_{i,j+1}+A_{i+1,j}+A_{i,j}}{4} \right) \\ &= -\frac{1}{\text{Re}} \frac{dP}{dx} + \frac{1}{\text{Re}} \left(\frac{(A_{i+1,j+1}+A_{i,j+1})-(A_{i+1,j}+A_{i,j})}{2\Delta y} \right) - \frac{Ha^2}{(1+m^2)} \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}+u_{i,j}}{4} \right) \\ & - \frac{mHa^2}{(1+m^2)} \left(\frac{w_{i+1,j+1}+w_{i,j+1}+w_{i+1,j}+w_{i,j}}{4} \right) - \frac{R}{\text{Re}} \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}+u_{i,j}}{4} \right) \\ & + \frac{R}{\text{Re}} \left(\frac{u_{pi+1,j+1}+u_{pi,j+1}+u_{pi+1,j}-u_{pi,j}}{4} \right) \end{aligned} \tag{20}$$

$$\begin{aligned} & \left(\frac{w_{i+1,j+1}-w_{i,j+1}+w_{i+1,j}-w_{i,j}}{2\Delta t} \right) + S \left(\frac{B_{i+1,j+1}+B_{i,j+1}+B_{i+1,j}+B_{i,j}}{4} \right) \\ &= \frac{1}{\text{Re}} \left(\frac{(B_{i+1,j+1}+B_{i,j+1})-(B_{i+1,j}+B_{i,j})}{2\Delta y} \right) - \frac{Ha^2}{(1+m^2)} \left(\frac{w_{i+1,j+1}+w_{i,j+1}+w_{i+1,j}+w_{i,j}}{4} \right) \\ & + \frac{mHa^2}{(1+m^2)} \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}+u_{i,j}}{4} \right) - \frac{R}{\text{Re}} \left(\frac{w_{i+1,j+1}+w_{i,j+1}+w_{i+1,j}+w_{i,j}}{4} \right) \\ & + \frac{R}{\text{Re}} \left(\frac{w_{pi+1,j+1}+w_{pi,j+1}+w_{pi+1,j}-w_{pi,j}}{4} \right) \end{aligned} \tag{21}$$

$$G \left(\frac{u_{pi+1,j+1}-u_{pi,j+1}+u_{pi+1,j}-u_{pi,j}}{2\Delta t} \right) = \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}-u_{i,j}}{4} \right) - \left(\frac{u_{pi+1,j+1}+u_{pi,j+1}+u_{pi+1,j}+u_{pi,j}}{4} \right) \tag{22}$$

$$G \left(\frac{w_{pi+1,j+1}-w_{pi,j+1}+w_{pi+1,j}-w_{pi,j}}{2\Delta t} \right) = \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}+u_{i,j}}{4} \right) - \left(\frac{u_{pi+1,j+1}+u_{pi,j+1}+u_{pi+1,j}+u_{pi,j}}{4} \right) \tag{23}$$

$$\begin{aligned} & \left(\frac{T_{i+1,j+1}-T_{i,j+1}+T_{i+1,j}-T_{i,j}}{2\Delta t} \right) + S \left(\frac{H_{i+1,j+1}+H_{i,j+1}+H_{i+1,j}+H_{i,j}}{4} \right) \\ &= \frac{1}{\text{RePr}} \left(\frac{(H_{i+1,j+1}+H_{i,j+1})-(H_{i+1,j}+H_{i,j})}{2\Delta y \text{RePr}} \right) + \frac{Ec}{\text{Re}} \left(\frac{A_{i+1,j+1}+A_{i,j+1}+A_{i+1,j}+A_{i,j}}{4} \right)^2 \\ & + \frac{Ec}{\text{Re}} \left(\frac{B_{i+1,j+1}+B_{i,j+1}+B_{i+1,j}+B_{i,j}}{4} \right)^2 + \frac{Ha^2 Ec}{\text{Re}(1+m^2)} \left(\frac{u_{i+1,j+1}+u_{i,j+1}+u_{i+1,j}+u_{i,j}}{4} \right)^2 \\ & + \frac{Ha^2 Ec}{\text{Re}(1+m^2)} \left(\frac{w_{i+1,j+1}+w_{i,j+1}+w_{i+1,j}+w_{i,j}}{4} \right) + \frac{2R}{3\text{Pr}} \left(\frac{T_{pi+1,j+1}+T_{pi,j+1}+T_{pi+1,j}+T_{pi,j}}{4} \right) \\ & - \frac{2R}{3\text{Pr}} \left(\frac{T_{i+1,j+1}+T_{i,j+1}+T_{i+1,j}+T_{i,j}}{4} \right) \end{aligned} \tag{24}$$

$$\left(\frac{T_{pi+1,j+1}-T_{pi,j+1}+T_{pi+1,j}-T_{pi,j}}{2\Delta t} \right) = -L_o \left(\frac{T_{pi+1,j+1}+T_{pi,j+1}+T_{pi+1,j}-T_{pi,j}}{4} \right) + L_o \left(\frac{T_{i+1,j+1}+T_{i,j+1}+T_{i+1,j}+T_{i,j}}{4} \right) \tag{25}$$

Equations (20)–(23) are solved first for the velocity of fluid and particle phases. Then, values of the velocity components are substituted in the right-hand side of Eqs. (24) which is solved numerically together with equation (25) under the initial and boundary conditions (19) to obtain the temperature distributions for the fluid and particle phases. Computations have been made for $C=-5$, $\alpha=1$, $Re=1$, $R=0.5$; $G=0.8$, $L_o=0.7$, $Pr=1$, and $E_c=0.2$. Grid-independence studies show that the computational domain $0 < t < \infty$ and $-1 < y < 1$ can be divided into intervals with step sizes $\Delta t=0.0001$ and $\Delta y=0.005$ for time and space respectively. Smaller step sizes do not show any significant change in the results. It should be pointed out that the results obtained here are reduced to those obtained in (Megahed et al., 1988 ; Aboul-Hassan et al., 1991) when the Hall parameter $m=0$. This ensures the accuracy and correctness of the solutions

5. Results and Discussion

Figures 1–3 present, respectively, the profiles of the velocity components u , u_p , w and $u_p w_p$ and temperatures T and T_p for various values of time t starting from $t=0$ up till the steady state. The figures are plotted for $Ha=1$, $m=3$ and $S=1$. Comparing Figs. 1(a), 2(a) and 3(a) with 1(b), 2(b) and 3(b), respectively, shows that the velocity components and temperature of the fluid phase reach the steady state faster than that of the particle phase. This is because the fluid velocity is the source for the dust particles' velocity. It is observed that the velocity components u and w and temperature T of the fluid phase increase with time for small values of time and then decrease as time develops. For some times they exceed their steady state values and then go down towards steady state. This can be explained as, the velocity u increases from its zero rest value which increases the driving force of w and then, increases w with time. The increase in w increases the resistive force on u and, in turn, decreases u and consequently w . The increase and decrease in u and w are expected to cause, respectively, corresponding increase and decrease in viscous and

Joule dissipations and, in turn, in temperature T .

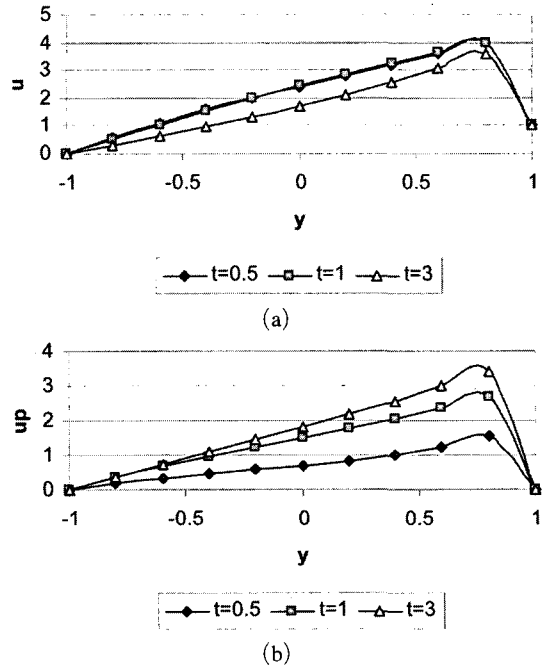


Fig. 1 Time variation of the profile of: (a) u and (b) u_p . ($Ha=1$, $m=3$, and $S=1$)

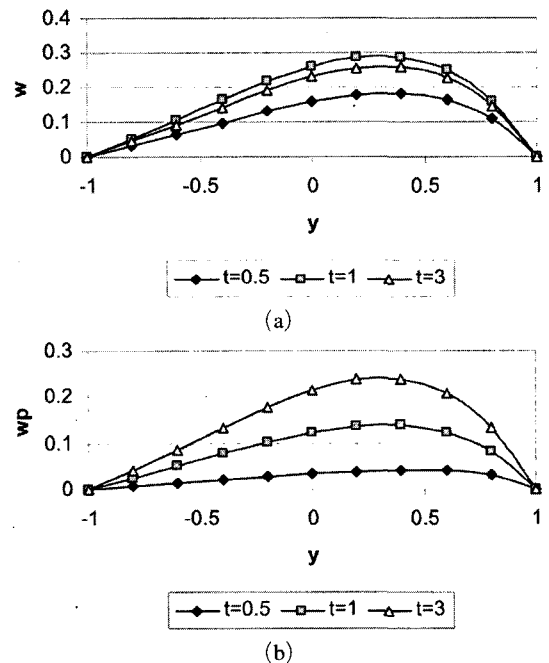


Fig. 2 Time variation of the profile of: (a) w and (b) w_p . ($Ha=1$, $m=3$, and $S=1$)

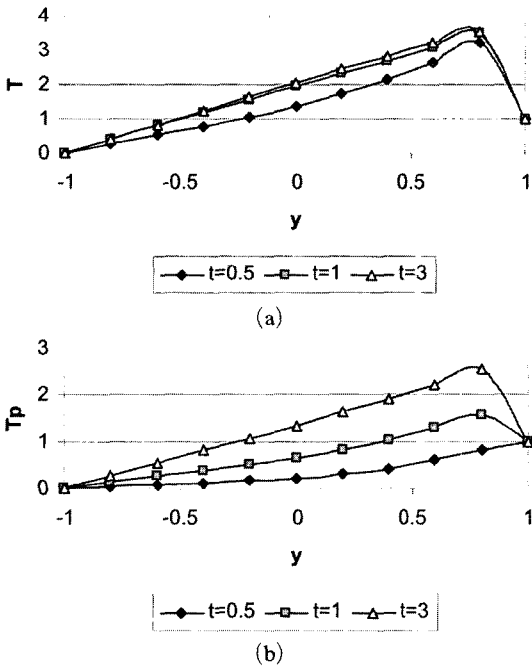


Fig. 3 Time variation of the profile of: (a) T and (b) T_p . ($Ha=1$, $m=3$, and $S=1$)

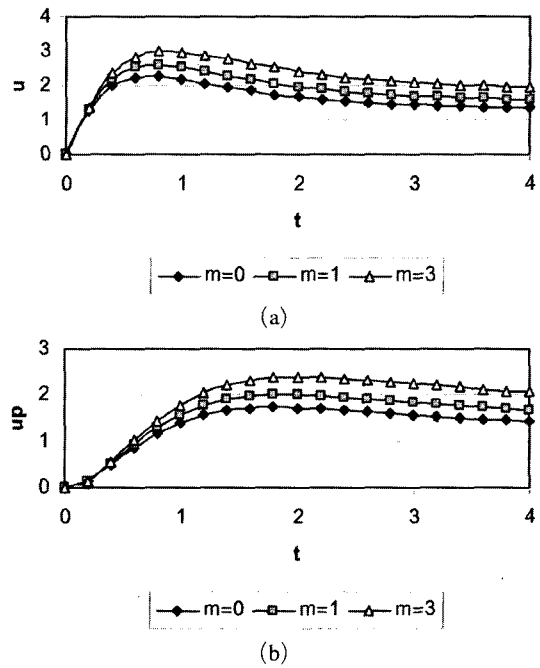


Fig. 4 Effect of the parameter m on the time variation of: (a) u at $y=0$ and (b) u_p at $y=0$. ($Ha=1$ and $S=0$)

Figures 4-6 show the time evolution of the velocity components and temperature at the centre of the channel ($y=0$), respectively, for the fluid and particle phases for various values of the Hall parameter m and for $Ha=1$ and $S=0$. It is clear from Figs. 4(a) and 4(b) that increasing the parameter m increases u and u_p . This is because the effective conductivity ($\sigma/(1+m^2)$) decreases with increasing m which reduces the magnetic damping force on u and consequently u and u_p increase. In Figs. 5(a) and 5(b), the velocity components w and w_p increases with increasing m slightly ($m=0$ to 1), since increasing m increases the driving force term ($mHa^2u/(1+m)$) in Eq. (13) which pumps the flow in the z -direction. However, increasing m more decreases the effective conductivity that results in a reduced driving force and then, decreases w and consequently, decreases w_p . Figures 6(a) and 6(b) indicate that increasing m decreases T and T_p slightly for all values of t . This can be attributed to the fact that an increase in m decreases the Joule dissipation which is proportional to $(1/(1+m^2))$. In general, the effect of m on the

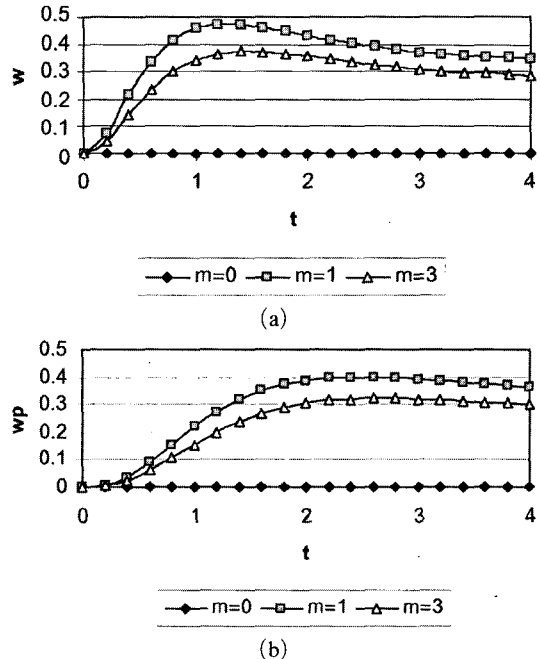


Fig. 5 Effect of the parameter m on the time variation of: (a) w at $y=0$ and (b) w_p at $y=0$. ($Ha=1$ and $S=0$)

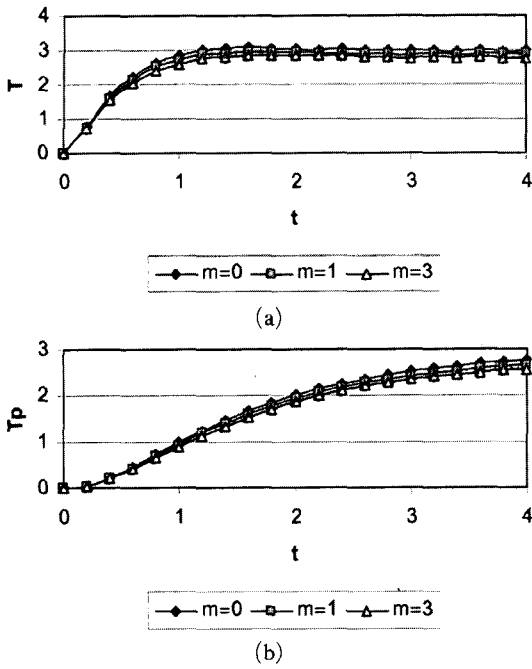


Fig. 6 Effect of the parameter m on the time variation of: (a) T at $y=0$ and (b) T_p at $y=0$. ($Ha=1$ and $S=0$)

temperature T can be neglected especially for higher values of t where the velocity components u and w become small and consequently, the viscous and Joule dissipations are neglected.

Figures 7-9 show the time evolution of the velocity components and temperature at the centre of the channel ($y=0$), respectively, for the fluid and particle phases for various m values of the Hartmann number Ha and for $m=3$ and $S=0$. Figures 7(a) and 7(b) indicate that increasing Ha decreases u and u_p as a result of increasing damping force on u . Figures 8(a) and 8(b) ensure that increasing Ha increases w and w_p since it increases the driving force on w . However, increasing Ha more increases w at small t but decreases it at large t . This can be attributed to the fact that large Ha decreases the main velocity u , which increases with time, and reduces the driving force on w which results in decreasing w at large t . Figures 9(a) and 9(b) show that the increasing Ha increases T and T_p slightly as a result of increasing the Joule dissipations. However, for higher Ha , the effect of Ha on T and

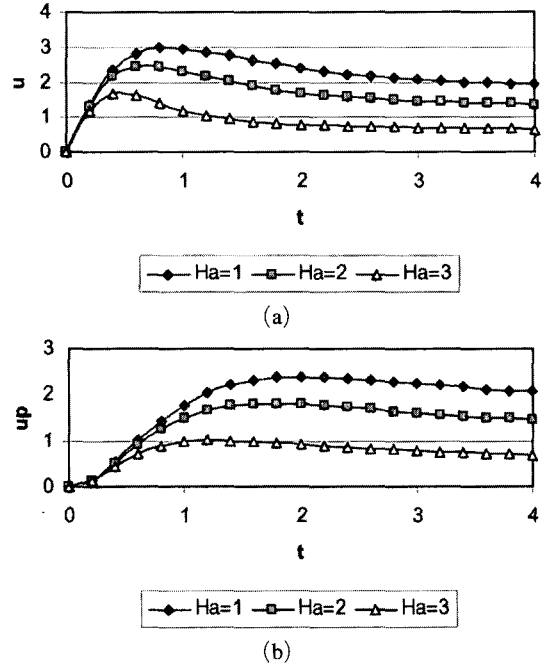


Fig. 7 Effect of the parameter m on the time variation of: (a) u at $y=0$ and (b) u_p at $y=0$. ($m=3$ and $S=0$)

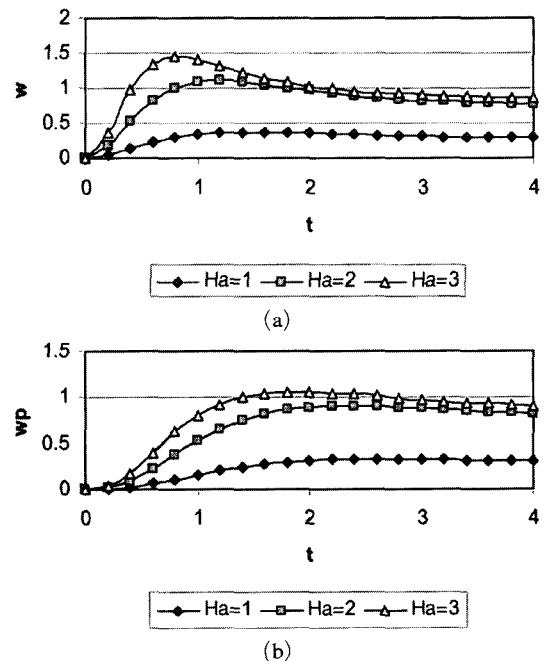


Fig. 8 Effect of the parameter m on the time variation of: (a) w at $y=0$ and (b) w_p at $y=0$. ($m=3$ and $S=0$)

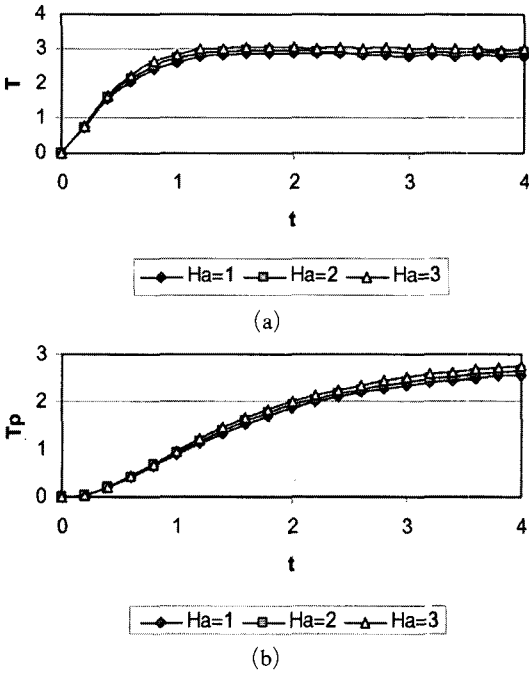


Fig. 9 Effect of the parameter m on the time variation of: (a) T at $y=0$ and (b) T_p at $y=0$. ($m=3$ and $S=0$)

T_p depends on time. For small t , increasing Ha increases T due to increasing the Joule dissipation. But, for large t , increasing Ha , decreases T as a result of decreasing the velocities u and w and consequently decreases the viscous and Joule dissipations. It should be mentioned that, the effect of Ha on the temperature T can be neglected especially for higher values of t where the velocity components u and w become small and consequently, the viscous and Joule dissipations are neglected.

Figures 10-12 present the time evolution of the velocity components and temperature at the centre of the channel ($y=0$), respectively, for the fluid and particle phases for various values of the suction parameter S and for $Ha=1$ and $m=3$. Figures 10(a), 10(b), 11(a), and 11(b) show that increasing the suction decreases u , w , u_p and w_p and their steady state times due to the convection of the fluid from regions in the lower half to the centre which has higher fluid speed. The effect of suction on the velocity components can be neglected for very small time, but becomes more

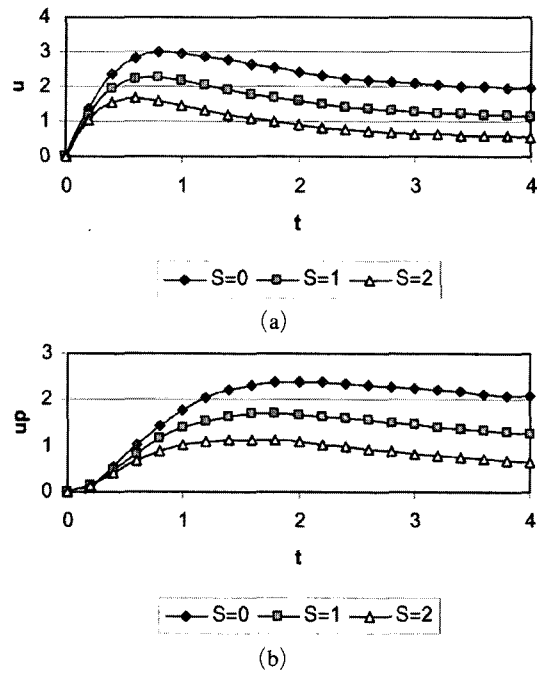


Fig. 10 Effect of the parameter m on the time variation of: (a) u at $y=0$ and (b) u_p at $y=0$. ($m=3$ and $Ha=1$)

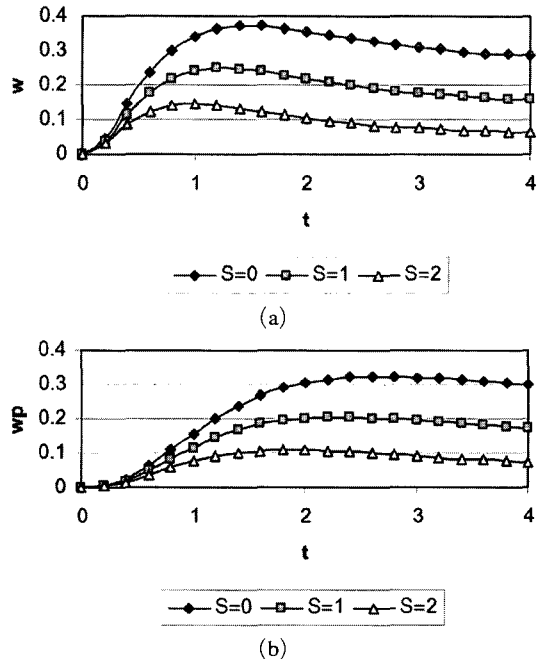


Fig. 11 Effect of the parameter m on the time variation of: (a) w at $y=0$ and (b) w_p at $y=0$. ($m=3$ and $Ha=1$)

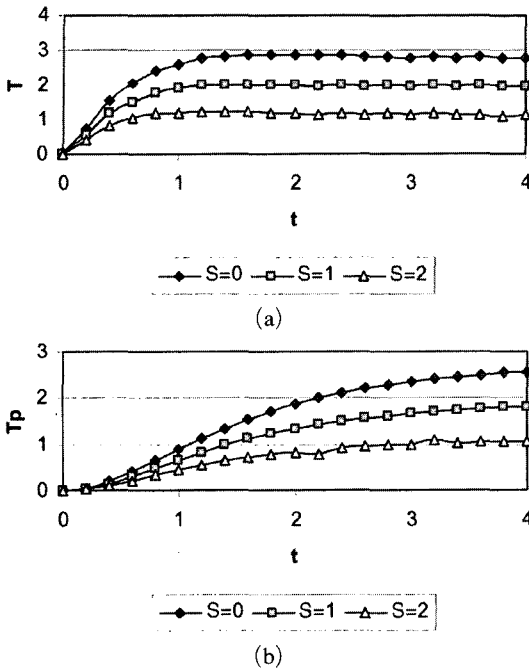


Fig. 12 Effect of the parameter m on the time variation of: (a) T at $y=0$ and (b) T_p at $y=0$. ($m=3$ and $Ha=1$)

pronounced as time develops. Figures 12(a) and 12(b) show that increasing S decreases the temperatures T and T_p at the centre of the channel. This is due to the influence of convection in pumping the fluid from the cold lower half towards the centre of the channel.

5. Conclusions

The unsteady Couette flow with heat transfer of a dusty conducting fluid under the influence of an applied uniform magnetic field has been studied, considering the Hall effect in the presence of uniform suction and injection and an exponential decaying pressure gradient. Introducing the Hall term gives rise to velocity components w and w_p in the z -direction for the fluid and particle phases and it affects the main velocities u and u_p in the x -direction. The effect of the magnetic field, the Hall parameter, and the suction and injection velocity on the velocity and temperature distributions for both the fluid and particle phases has been investigated. The main two com-

ponents of velocity of the fluid and dust particles u and u_p , respectively, were found to increase with increase in the Hall parameter m . However, the other two components of velocity w and w_p which result due to the Hall effect increase with the Hall parameter m for small m and decrease with m for large values of m . It was found also that the effect of large magnetic field on the velocity components w and w_p depends on time. In general, the effect of the magnetic field or the Hall parameter on the temperature both fluid and particle phases can be neglected especially for higher values of time.

References

- Aboul-Hassan, A. L., Sharaf El-Din, H. and Megahed, A. A., 1991, "Temperature due to the Motion of One of Them," *First International Conference of Engineering Mathematics and Physics*, Cairo, pp. 723.
- Aboul-Hassan, A. L. and Attia, H. A., 2002, "Hydromagnetic Flow of a Dusty Fluid in a Rectangular Channel with Hall Current and Heat Transfer," *Can. J. Phys.*, Vol. 80, No. 5, pp. 579~589.
- Ames, W. F., 1977, *Numerical Solutions of Partial Differential Equations*, Second Ed., Academic Press, New York.
- Attia, H. A., 1998, "Hall Current Effects on the Velocity and Temperature Fields of an Unsteady Hartmann Flow," *Can. J. Phys.*, Vol. 76, No. 9, pp. 739~746.
- Attia, H. A., 2002, "Transient Hartmann Flow with Heat Transfer Consideration the Ion Slip," *Physica Scripta*, Vol. 66, No. 6, pp. 470~475.
- Attia, H. A., 2005, "The Effect of Suction and Injection on Unsteady Flow of a Dusty Conducting Fluid in Rectangular Channel," *Journal of Mechanical Science and Technology*, Vol. 19, No. 5, pp. 1148~1157.
- Borkakotia, K. and Bharali, A., 1983, "Hydromagnetic Flow and Heat Transfer between Two Horizontal Plates, the Lower Plate being a Stretching Sheet," *Quarterly of Applied Mathematics*, pp. 461.
- Chamkha, A. J., 2000, "Unsteady Laminar Hy-

dromagnetic Fluid-Particle Flow and Heat Transfer in Channels and Circular Pipes," *International J. of Heat and Fluid Flow*, Vol. 21, pp. 740~746.

Crammer and Pai, 1973, *Magnetofluid Dynamics for Engineer and Scientists*, McGraw-Hill, 1973.

Dixit, L. A., 1980, "Unsteady Flow of a Dusty Viscous Fluid Through Rectangular Ducts," *Indian Journal of Theoretical Physics*, Vol. 28, No. 2, pp. 129.

Ghosh, A. K. and Mitra, D. K., 1984, "Flow of a Dusty Fluid Through Horizontal Pipes," *Rev. Roum. Phys.*, Vol. 29, No. 631.

Gupta, R. K. and Gupta, S. C., 1976, "Flow of a Dusty Gas Through a Channel with Arbitrary Time Varying Pressure Gradient," *Journal of Applied Mathematics and Physics*, Vol. 27, pp. 119.

Lohrabi, J., 1980, "Investigation of Magneto-hydrodynamic Heat Transfer in Two-Phase Flow," *Ph. D. Thesis, Tennessee Technological University, P.I.*

Megahed, A. A., Aboul-Hassan, A. L. and Sharaf El-Din, H., 1988, "Effect of Joule and Viscous Dissipation on Temperature Distributions Through Electrically Conducting Dusty Fluid," *Fifth Miami International Symposium on Multi-Phase Transport and Particulate Phenomena ; Miami Beach, Florida, USA*, Vol. 3, pp. 111.

Mitra, P. and Bhattacharyya, P., 1981, "Un-

steady Hydromagnetic Laminar Flow of a Conducting Dusty Fluid between Two Parallel Plates Started Impulsively from Rest," *Acta Mechanica*, Vol. 39, pp. 171.

Prasad, V. R. and Ramacharyulu, N. C. P., 1979, "Unsteady Flow of a Dusty Incompressible Fluid between Two Parallel Plates under an Impulsive Pressure Gradient," *Def. Sci. Journal*, Vol. 30, pp. 125.

Saffman, P. G., 1962, "On the Stability of a Laminar Flow of a Dusty Gas," *Journal of Fluid Mechanics*, Vol. 13, pp. 120.

Schlichting, H., 1968, *Boundary Layer Theory*, McGraw-Hill.

Singh, K. K., 1976, "Unsteady Flow of a Conducting Dusty fluid through a Rectangular Channel with Time Dependent Pressure Gradient," *Indian Journal of Pure and Applied Mathematics*, Vol. 8, No. 9, pp. 1124.

Soundalgekar, V. M., Vighnesam, N. V. and Takhar, H. S., 1979, "Hall and Ion-Slip Effects in MHD Couette Flow with Heat Transfer," *IEEE Transactions on Plasma Science*, Vol. PS-7, No. 3, pp. 178~182.

Soundalgekar, V. M. and Uplekar, A. G., 1986, "Hall Effects in MHD Couette Flow with Heat Transfer," *IEEE Transactions on Plasma Science*, Vol. PS-14, No. 5, pp. 579~583.

Sutton, G. W. and Sherman, A., 1965, *Engineering Magnetohydrodynamics*, McGraw-Hill, 1965.