

Coaxial Feed Wideband CP antenna for RFID Applications

Kyu-Dae Park and Hwan-Yong Kim, *Member, KIMICS*

Abstract—Wideband terminal and base station is required to serve not only existing 1st and 2nd generation mobile communication systems but also 3rd generation systems. In this paper, we present a feasibility study on coaxial feed compact wideband antenna for UHF RFID reader application. The original antenna was designed for partial discharge detection sensor in high voltage diagnostic system. However, we modified the original prototype to achieve shifted down resonant frequency for wideband wireless communication applications. The experimental result shows good return loss characteristics and radiation patterns except for the total gain at each resonant frequency. The maximum measured gain was 2.45 dBi ~ 3.18 dBi at 910MHz.

Index Terms—Wideband, antenna, RFID, reader, UHF, transponder.

I. INTRODUCTION

In the recent years, there has been an increasing demand on providing enhanced functionality for wireless communications services with wideband terminal or base station. Wideband resonance point of view, pulse and broadband applications require that the antenna with good impedance matching and high radiation efficiency on entire band. [1-2]

Furthermore, many techniques have been proposed to increase resonance bandwidth and compact size from experimental results. [3-4] According to the present demand on wideband antenna based on UWB technology, we focus on the three major areas of feasibility study related to size reduction, wideband or multiple band, and radiation pattern.

In this paper, we have modified the partial discharge (PD) detection sensor originally developed for high voltage diagnosis as to applying feasibility for multiple band resonance. [5]

Attenuation of electromagnetic PD pulse is a function of frequency along the propagation path. The higher the frequency components will be attenuated rapidly when they travel along the high voltage equipments. Therefore, the detectable electromagnetic (EM) wave emitted from PD includes broadband signal of VHF/UHF (30MHz to 300MHz / 300MHz to 3000MHz). [5]

We tried to modify UWB sensor based on new design compact low frequency techniques which can operate between 908.5MHz and 914MHz bands. CST MS version 5.2, microwave simulation software was used to design and implement wideband antenna.

II. DESIGN AND FABRICATION

Generally, microstrip patch antennas consist of a metallic patch that is on the top of a grounded dielectric substrate of thickness h , with relative permittivity, and permeability.

Patch antennas are widely used in microwave frequency range but they are often used in millimeter-wave frequency range as well by modifying various shapes of patch design [6]. The metallic patch essentially creates a resonant cavity, where the patch is the top of the cavity, the ground plane is the bottom of the cavity and the edges of the patch from the sides of the cavity.

The edges of the patch act approximately as an open-circuit boundary condition.

Hence, the patch cavity modes are described by a double index (m,n) . For (m,n) cavity mode of the rectangular patch, the electric field has the form.

$$E_x(x, y) = A_{mn} \cos\left(\frac{m\pi x}{L}\right) \cos\left(\frac{n\pi y}{W}\right) \quad (1)$$

where L is the patch of length and W is the patch width. The patch is usually operated in the $(1,0)$ mode, so that L is the resonant dimension, the field is essentially constant in the y direction. The resonant frequency of the $(1,0)$ mode is given by

$$f_0 = \frac{c}{2L_e \sqrt{\epsilon_r}} \quad (2)$$

where c is the speed of light in vacuum. To account for the fringing of the cavity fields at the edge of the patch, the length, the effective length L_e is chosen as

$$L_e = L + 2\Delta L \quad (3)$$

Manuscript received August 8, 2008; revised November 21, 2008.

Kyu-Dae Park is with the Department of Electronics, Graduate School of Wonkwang University, 570-749, Korea (Tel: +82-63-850-6740, Fax: +82-63-850-7466, e-mail: chinfo@daum.net)

Hwan-Yong Kim is with the Division of Electrical, Electronics and Information, Wonkwang University, 570-749, Korea (Tel: +82-63-850-6740, Fax: +82-63-850-7466, e-mail: hvkim@wonkwang.ac.kr)

The Hammerstad formula for the fringing extension is [7] as follow.

$$\Delta L / h = 0.412 \frac{(\epsilon_{eff} + 0.3) \left(\frac{W}{h} + 0.264 \right)}{(\epsilon_{eff} - 0.258) \left(\frac{W}{h} + 0.8 \right)} \quad (4)$$

$$\epsilon_{eff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left(1 + 10 \frac{h}{W} \right)^{-1/2} \quad (5)$$

For this mode the patch may be regarded as a wide microstrip line of width W , having resonant length L , that is approximately one half-wavelength in the dielectric. The current is maximum at the centre of the patch, while the electric field is maximum at the “radiating” edges, $x=0$, and $x=L$. The width W is usually chosen to be larger than the length ($W=1.5L$ is typical) to maximize the bandwidth, since the bandwidth is proportional to the width of the antenna bandwidth.

The basic of this design is a rectangular element improved for wider bandwidth in low frequency and can detect signal from near field. The width of the patch element is chosen 1.5 times of resonant length and modified with two notched patch which can be operate both low and high frequencies as ultra-wide band operating. Our UWB sensor design was realized on FR4 substrate ($\epsilon_r=4.4$, thickness =2.4mm) in order to have low cost. At Low frequencies the antenna size is the principal constraint, e.g. at 500MHz, the dimension of $\lambda/2$ antenna is 30 cm. It is very difficult to integrate as a sensor. Therefore to reduce the antenna size at low frequency by using notched patch antenna.

Simulation has been carried out with CST MWS version 5.1, to determine resonant bandwidth, return loss and input impedance. The rectangular patch element is feed by microstrip line access, which is a common microwave transmission line that offers fairly good performances in the term of bandwidth at low cost.

To increase the antenna bandwidth, two cutting notches are used in the rectangular patch by controlling impedance stability. These notches alter the electro magnetic coupling between the rectangular patch and ground plane. The width of the notches is particularly effective either at low or high frequencies. Matching can be obtained by inserting a slot in the ground plane. The characteristics of the antenna highly depend on the ground plane shape: The best result can be obtained changing ground length L_g with the ground slot of W_s .

These notches alter the electromagnetic coupling between the rectangular patch and ground plane [7]. In sensor design structure, the main rectangular patch element is modified with three notched patched elements and microstrip line feeding method is used. Some parts of ground region is removed and modified with ground slot to get wider bandwidth.

The width of the notches is particularly effective

either at low or high frequencies. Matching improvement can be obtained by inserting a slot in the ground plane [6]. The optimization parameters are W_{n1} , W_{n2} , W_f and W_s while we fixed feed line length L_f .

The overall size of this structure is $106 \times 64 \text{ mm}^2$. The width and the length of the feed line W_f and L_f are fixed 2mm and 29.6mm to obtain the input impedance of 50Ω . The complete UWB antenna sensor design diagram is as shown in Fig 1.

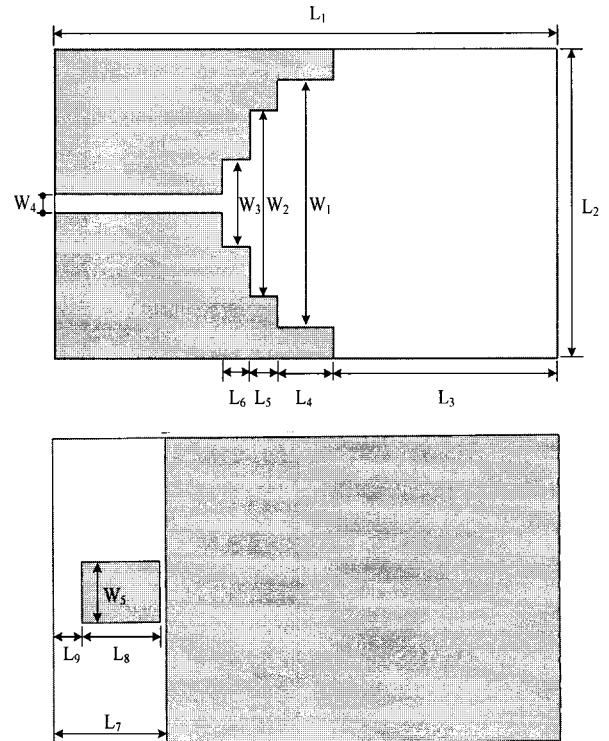


Fig. 1 Geometry of the proposed RFID antenna.

Several parameters optimizations are made by simulation to get the desired bandwidth and target frequency. Optimization procedure is shown in Fig. 2 ~ Fig. 5, respectively.

In the Fig. 2, we simulated parameter sweep on slot length where ground length and notch width are fixed. Simulated result of parameter sweep on dielectric substrate thickness shows optimized value should be 2.4 mm as shown in Fig. 3. Furthermore we find the best ground length by parameter sweep between 21 mm and 27 mm where notch width and slot length are fixed. We summarized the procedure in Fig. 4 ~ 5, respectively. We found optimal ground length should be 24 mm.

To decide the resonant frequency band of the antenna, the return loss parameter S_{11} is carried out by simulation. The final simulation result of return loss with the optimized parameters is shown in Fig 6 where S_{11} in dB at GSM, GPS, ISM IEEE802.11a band was -13.11 dB, -13.24 dB and -20.55 dB, respectively. Furthermore, resonance bandwidth calculated through about 2.3 GHz.

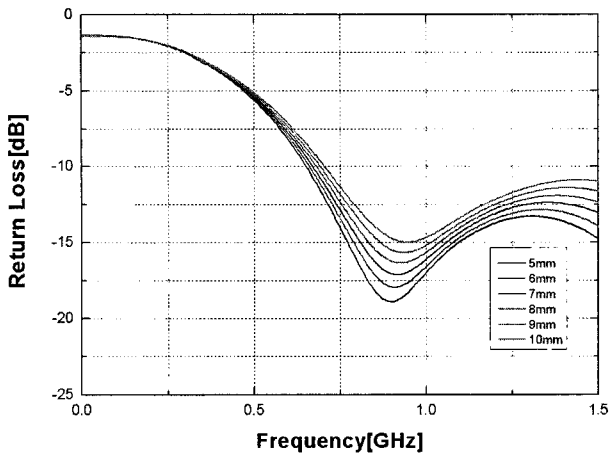


Fig. 2 L_9 optimization as to S_{11} from 5mm to 10mm

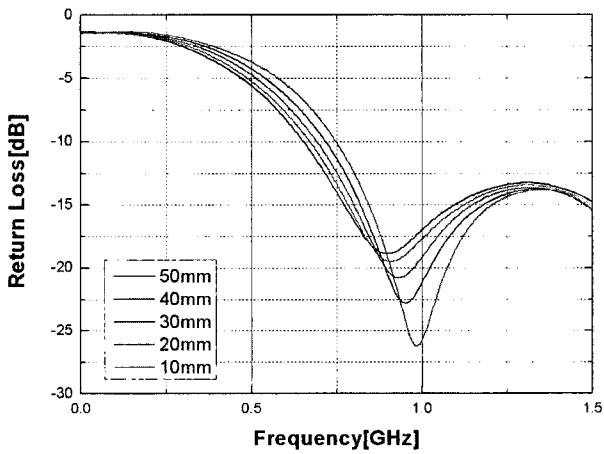


Fig. 3 L_2 optimization as to S_{11} from 10mm to 50mm

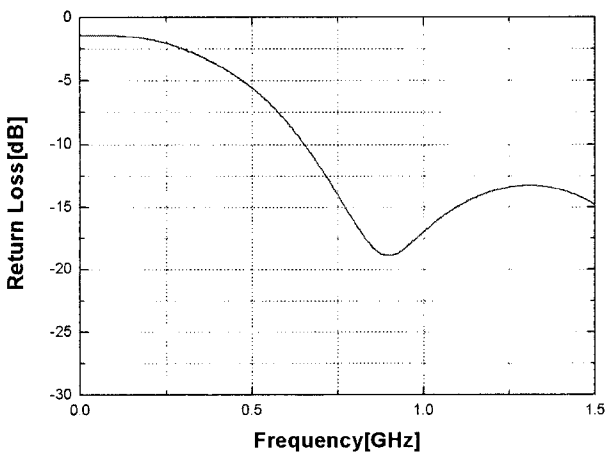


Fig. 4 Return loss simulation results with final dimensions showing -10dB bandwidth.

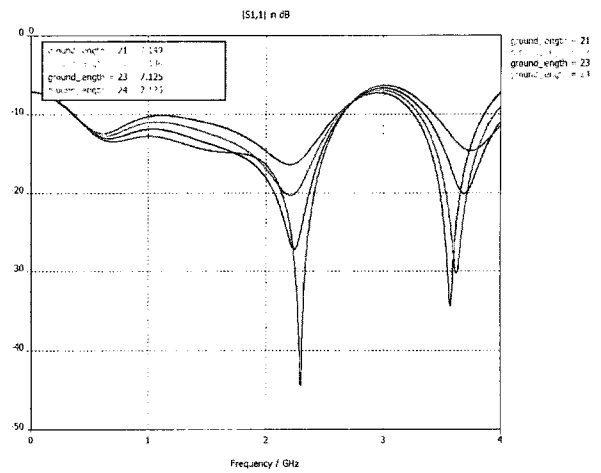


Fig. 5 Simulated result of parameter sweep on ground length between 21 mm and 24 mm where notch width and slot length are fixed.

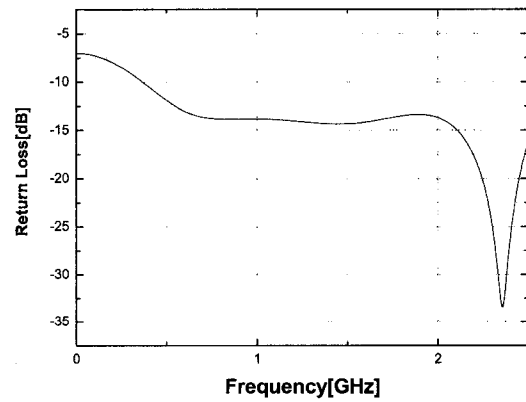


Fig. 6 The return loss simulation results with final dimensions and showing -10dB bandwidth.

The operating -10 dB bandwidth of proposed antenna was optimized at the frequency from 365MHz to 2,624 MHz as shown in Fig 6.

The radiation pattern is one of the important characteristics of the antenna. As to the simulation result, we found the maximum antenna gain could be up to 7.26 dBi, however measured value is much less than simulated result.

It is considered that alignment between feed line on the radiating element and slot line on the ground plane could have influence on total antenna gain.

After several simulations on optimization of return loss with the desire frequencies, the final dimensions of the parameters in RFID reader antenna are shown in Table. 1.

Table 1. Optimized parameters

Symbol	Dimension (mm)	Symbol	Dimension (mm)
L_1	90	L_8	15
L_2	50	L_9	5
L_3	40	W_1	40
L_4	10	W_2	30
L_5	5	W_3	14
L_6	5	W_4	3
L_7	20	W_5	10

The radiation pattern of this wideband antenna was simulated at 910MHz and shown in Fig 7.

Proposed antenna was fabricated by photolithographic etching technique, making the construction relatively easy an inexpensive using with FR4 dielectric material.

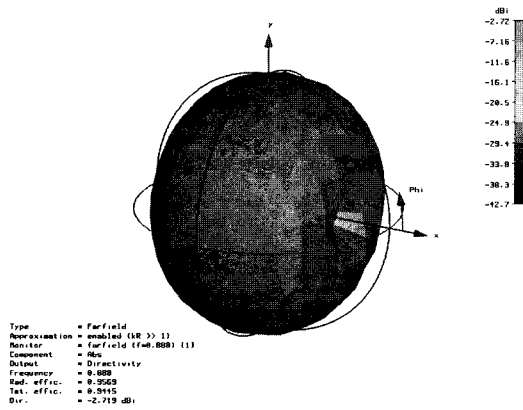


Fig. 7 Simulated far-field radiation pattern.

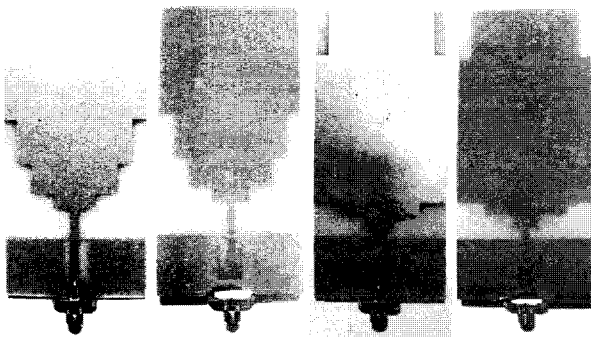


Fig. 8 Prototype of the fabricated wideband antenna.

III. EXPERIMENTS

The measured return loss for each frequencies and radiation pattern are shown Fig. 9 ~ Fig. 11, respectively. Good agreement with resonant characteristics is observed except for antenna gain. The Maximum gain was 2.45 dBi ~ 3.18 dBi at 910MHz.

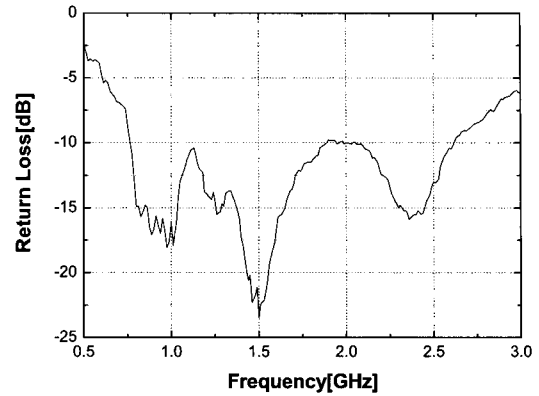


Fig. 9 Measured return loss for the proposed antenna

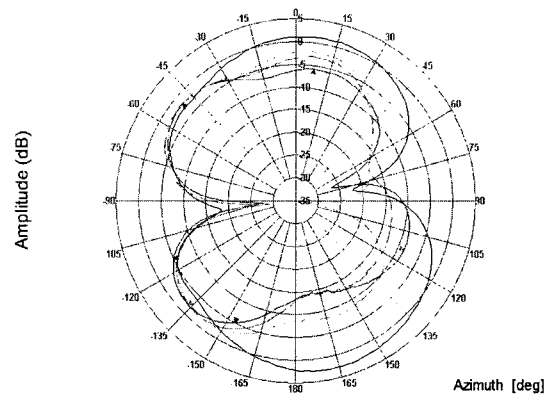


Fig. 10 Measured E-pattern at 910MHz.

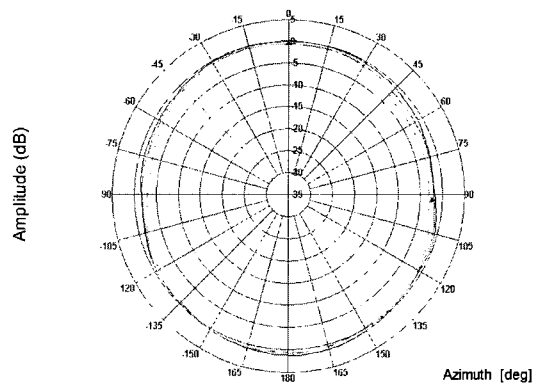


Fig. 11 Measured H-pattern at 910MHz.

IV. CONCLUSIONS

In this paper, we presented feasibility study on single feed compact wideband antenna for multiple wireless communication applications. The experimental results shows good return loss characteristics and radiation patterns at each resonant frequency. The maximum measured gain was 2.45 dBi ~ 3.18 dBi at 910MHz. The proposed antenna is able to operate at the UHF RFID


application bands and its performance is verified by experimental results.

ACKNOWLEDGMENT

This paper was supported by Wonkwang University in 2008.

REFERENCES


- [1] D. Valderas, J. Legarda, I. Gutierrez, and J. I. Sancho, "Design of UWB Folded-Plate Monopole Antennas Based on TLM", IEEE Trans. AP, Vol.54, No.6, June, 2006.
- [2] M. S. Yap, L. Ng, and S. Aditya, "A Triple Band Antenna for GSM and GPS Application", ICICS-PCM 2003, Singapore, 2B7.6, Dec. 2003.
- [3] M. J. Ammann and Z. N. Chen "An asymmetrical feed arrangement for improved impedance bandwidth of planar monopole antennas," Microwave Opt. Technol. Lett., vol. 40, pp. 156, Jan. 20, 2004.
- [4] S.Gulski, A.R Samuel, L. Kehl, H.T.F Geene, "Partial Discharge Location in HV Cables with Travelling system," 1996 IEEE International Symposium on EI, June 16-19, 1996.
- [5] K. S. Lwin, et. al., "Off-line PD Diagnosis for Stator Winding of Rotating Machines using UWB Sensors," 2008 International Conf. on Condition Monitoring and Diagnosis, Beijing, Apr. 21-24, 2008
- [6] R. Garg, P. Bhartia, I. Bahl, A. Ittipiboon, "Microstrip Antenna Design Handbook," Artech House, 2000.
- [7] D. M. Pozar and D. H. Schaubert, "Microstrip Antenna: The Analysis and Design of Microstrip Antennas and Array," IEEE Express, 1995.



Kyu-Dae Park

He received B.S., M.S. degrees in Electronics Engineering from Wonkwang University in 1985 and 1993, respectively. Since 2000, he has been CEO of Chung-Nam Information & Communications Co., Ltd. His research interests include mobile communications and RFID

Applications.



Hwan-Yong Kim

He received B.S. degree in Electrical Engineering from Chonbuk National University in 1973 and M.S. and Ph.D. degrees in Electronics Engineering from Chonbuk National University in 1978 and 1984, respectively. From 1986 to 1987, he was a visiting professor with the University of

Manitoba, Canada.

In 1979, he joined the faculty of Wonkwang University where he is currently a professor in division of Electrical, Electronic and Information Engineering. From 2003 to 2005, he was a chairman at the college of engineering, Wonkwang University. Since 2004, he is a director of Embedded NURI at Wonkwang University financially supported by MEST, Korea. His main research interests are in the areas of communication systems, circuits and systems.