

Case Study for Ship Ad-hoc Networks under a Maritime Channel Model in Coastline Areas

Xin Su¹, HaiFeng Yu², KyungHi Chang², Seung-Geun Kim³ and Yong-Kon Lim³

¹The Department of Program in IT & Media Convergence Studies, Inha University
Incheon, Korea

[e-mail: leosu8622@163.com]

²Electronic Engineering Department, Inha University
Incheon, Korea

[e-mail: edric1012@gmail.com, khchang@inha.ac.kr]

³Korea Research Institute of Ship & Ocean Engineering (KRISO)
Daejeon, Korea

[e-mail: sgkim@kriso.re.kr, yklim@kriso.re.kr]

*Corresponding author: KyungHi Chang

*Received May 28, 2015; revised August 10, 2015; accepted August 20, 2015;
published October 31, 2015*

Abstract

ITU-R M.1842-1, as a well-known specification dedicated to maritime mobile applications, has standardized wireless transmission protocols according to the particular characteristics of a maritime communications scenario. A time division multiple access (TDMA) frame structure, along with modulation schemes to achieve a high data rate, has been described clearly in ITU-R M.1842-1. However, several specification items are still under “to be decided” status, which brings ambiguity to research works. In addition, the current version of ITU-R M.1842-1 is focused mainly on maritime transmissions in open-sea areas, where the cyclic prefix (CP) is set to zero and only 16-QAM is used in the multi-carrier (MC) system. System performance might be dramatically degraded in coastline areas due to the inter-symbol interference (ISI) caused by selective fading. This is because there is a higher probability that the signal will be reflected by obstacles in coastline areas. In this paper, we introduce the transmission resource block (TRB) dedicated to ITU-R M.1842-1 for a ship ad-hoc network (SANET), where the pilot pattern of TRB is based on the terrestrial trunked radio (TETRA). After that, we evaluated SANET performance under the maritime channel model in a coastline area. In order to avoid noise amplification and to overcome the ISI caused by selective fading, several strategies are suggested and compared in the channel estimation and equalization procedures, where the link-level simulation results finally validate our proposals.

Keywords: ITU-R M.1842-1, SANET, TETRA, Channel Estimation, Channel Equalization

This work was supported by Basic Science Research Program through the National Research Foundation of Korea (NRF) funded by the Ministry of Education (2013R1A1A2010287), and the project “Development of Marine RF based ad-hoc network for ship” from Ministry of Oceans and Fisheries (MOF), Korea.

1. Introduction

Maritime communications systems, such as the global maritime distress/safety system and the automatic identification system (AIS) [1-3], have focused applications on ship security, location tracking, identification, and so on. Recently, there has been a gradual demand in maritime communications for various multimedia services, such as marine video surveillance and underwater video sensing. Without loss of generality, a satellite system is a good candidate for realizing multimedia services, especially for ships that rarely find other neighboring ships. However, when ships can easily locate neighboring ships, a satellite system becomes burdensome due to its remarkably high cost. The ship ad-hoc network (SANET) [4-10], a maritime counterpart of the terrestrial vehicle ad-hoc network, thus needs to provide those diverse multimedia services in a maritime communications system. Based on a survey of terrestrial vehicle ad-hoc networks and the maritime communications environment, we realized that simply implementing the radio transmission technology (RTT) of a terrestrial vehicle ad-hoc network for maritime communications holds many challenges and open problems. For the purpose of enhancing the service quality of maritime communications, RTT for SANET is designed with multi-hop functionality in our previous work [4-9]. Reference [6] focused on the design of the SANET physical layer, where a novel frame structure was proposed based on Ad-hoc Self-organizing Time Division Multiple Access (ASO-TDMA) scheme as provided in [8] and [9]. Different from [8] and [9], the proposed frame structure in [6] considered the special topology of SANET, where the number of ships located near seashore is usually more than the area far from seashore. Reference [7] presented the SANET transmission resource block and evaluated the performance of channel equalization based on the measured maritime wireless channel model, and References [4] and [5] tried to improve the link reliability for SANET by employing multiple antennae.

ITU-R M.184-1 was released as a recommendation that characterizes very high frequency (VHF) radio systems for data exchange in maritime mobile services [11]. In Annex-5 of ITU-R M.184-1, the VHF data link protocols for maritime mobile services are described along with a time division multiple access (TDMA) frame structure to achieve high data-rate maritime applications. However, several specification items in ITU-R M.184-1 are still under “to be decided” status, which brings ambiguity to research works. For example, Annex 5 in ITU-R M.184-1 specifies 2,250 timeslots in a data frame, whereas the details for the transmission resource block (TRB) of a timeslot are not provided. The system performance of a SANET should be examined based on the information of the TRB, including training sequence pattern, length of a symbol, number of symbols in the TRB, and so on. On the other hand, for the current version of ITU-R M.1842-1, the cyclic prefix (CP) is set as zero and only 16-QAM is used in the multi-carrier (MC) system, to keep the spectrum efficiency because it mainly focuses on the maritime transmission in the open-sea area. Therefore, the system performance is usually evaluated under the flat fading channel with a line-of-sight (LOS) signal component. System performance might be dramatically degraded in a coastline area due to the inter-symbol interference (ISI) caused by selective fading. This is because there is a higher probability that the signal will be reflected by obstacles in coastline areas [12].

In this paper, the TRB for ITU-R M.1842-1 along with the positioning of training sequences by referring to the Terrestrial Trunked Radio (TETRA) specification [13] is introduced, where 72 pilot symbols are arranged within the TRB in order to allow a reasonable sampling of the channel time-frequency response without incurring considerable efficiency

loss. Based on the TRB with a TETRA-like pilot pattern, we evaluated SANET performance under a coastline maritime channel model. To avoid noise amplification and to overcome the ISI caused by selective fading, several novel and practical strategies are suggested and compared in the channel estimation and equalization procedures, where the simulation results finally validate our proposals.

The rest of this paper is organized as follows. Section 2 describes the transmission scenario of a SANET in a coastline area, and Section 3 presents the TRB with a TETRA-like pilot pattern for ITU-R M.1842-1. In Section 4, we examine three channel estimators with the capability of validation to avoid noise amplification, and in Section 5, a decision feedback equalizer is suggested to overcome the ISI effect under a coastline maritime channel model. Finally, we conclude this paper in Section 6.

2. SANET Transmission Scenario in Coastline Areas

Fig. 1 depicts the SANET transmission scenario in coastline areas, where there is a higher probability that the signal will be reflected by obstacles in the coastline area. Signal transmissions colored white in **Fig. 1** represents multi-hop transmission. System performance might be degraded dramatically by simply employing the ITU-R M.184-1 specification in such an environment due to the inter-symbol interference (ISI) caused by selective fading. The maritime VHF channel model for both open-sea and coastline areas is described by Kim [14], and channel parameters are listed in **Table 1**. According to **Table 1**, we notice that the channel environment on a coastline is a two-path fading channel composed of the first Rician distributed path and the second Rayleigh distributed path. The relative delay of the second path is 5 μs , and its power decay is -3 dB. The mathematical description of a coastline two-path channel model is given as

$$\begin{aligned} g_{i,k}(t) &= h_{i,k}^{\text{Rician}} + h_{i,k}^{\text{Rayleigh}} \\ &= \sqrt{\frac{M}{M+1}} \left(\sqrt{\frac{K}{K+1}} + \sqrt{\frac{K}{K+1}} h_{i,k}^1(t) \right) \delta(t) \\ &\quad + \sqrt{\frac{M}{M+1}} h_{i,k}^2(t) \delta(t-\tau), \end{aligned} \quad (1)$$

where $h_{i,k}^1(t)$ and $h_{i,k}^2(t)$ are two independent Rayleigh paths. $h_{i,k}^1(t)$ is used to generate the Rician path $h_{i,k}^{\text{Rician}}$ via the Rician K -factor. M is the normalization factor for two paths, and τ is the relative delay of the second path.

3. Transmission Resource Block Design for ITU-R M.1842-1

According to the TDMA frame structure demonstrated in **Fig. 2** [11], we notice that one TDMA hyper-frame contains five super-frames with each covering 12 seconds. A super-frame

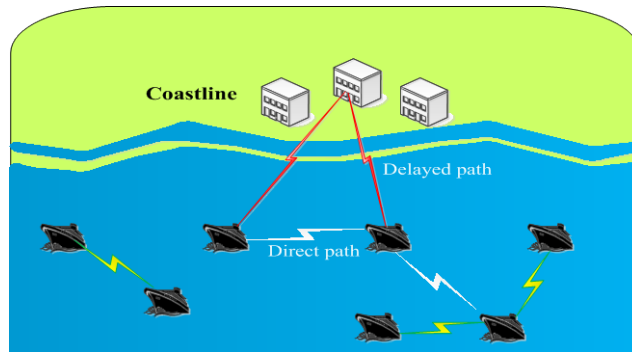


Fig. 1. SANET transmission scenario in coastline areas.

Table 1. Maritime channel model

Scenario	Path Index	Delay Spread (us)	K (dB)	Average Relative Power (dB)
Coastline	0	0	10	0
	1	5	0	-3
Open sea	0	0	15	0

has 15 multi-frames, with each of them covering 800 ms. There are five data frames holding six time slots in one multi-frame, and each time slot covers about 26.667 ms and includes 64 time symbols. Therefore, the symbol length [11] is around 416.667 μ s. According to the above descriptions, and referring to the TRB structure provided [13], the TRB for ITU-R M.184-1 is illustrated in Fig. 3.

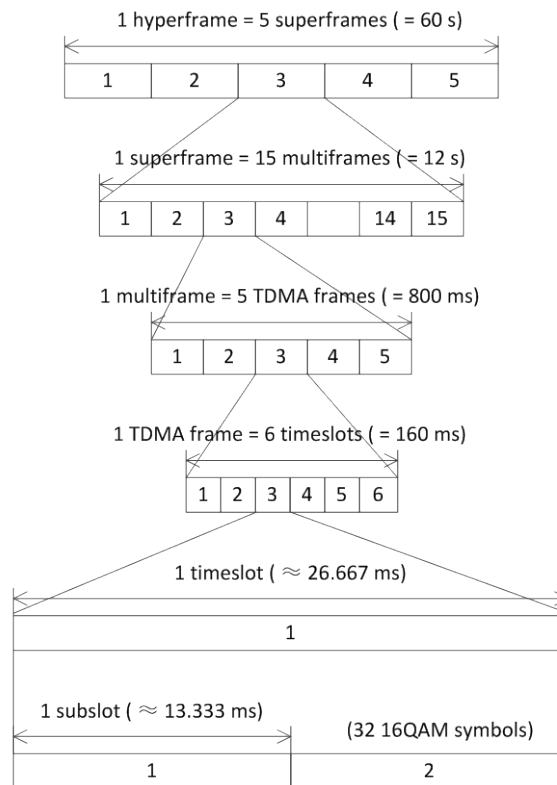


Fig. 2. TDMA frame structure in ITU-R M.184-1.

In Fig. 3, there are 16 sub-carriers with a spacing of 3.125 kHz that occupy a 50 kHz bandwidth. The symbol sequence on each sub-carrier starts with two preambles that are intended for frequency and time clock synchronization recovery. Note that the frequency accuracy must be within ± 100 Hz [13], while the timing difference from the logic clock should not exceed $125/9$ μ s. By the TRB, there are 72 pilot symbols arranged within the frequency/time grid for a reasonable sampling of the channel time-frequency response without incurring considerable efficiency loss. The pilot spacing in the time and frequency dimensions has been chosen so that an accurate estimation of the channel response can be achieved even under the selective fading channel described in Section 2.

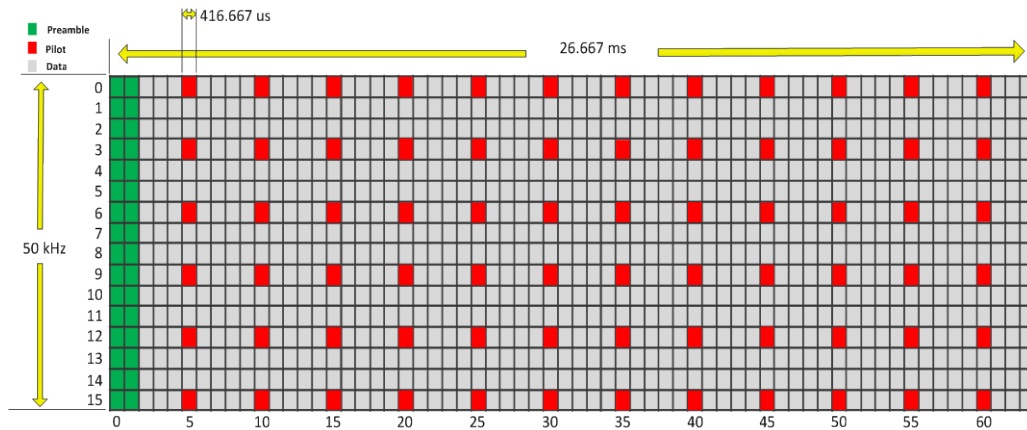


Fig. 3. TRB structure with a TETRA-like pilot pattern for ITU-R M.184-1 (50 kHz bandwidth).

For the training sequence generation, TETRA specifies a phase locus where the detailed phase value for 25, 50, 100, and 150 kHz MC systems can be found [13]. In this paper, we compare the autocorrelations among those four types of training sequence, as demonstrated in Fig. 4. According to Fig. 4, we observe that the training sequence employed for a 150 kHz MC system, compared with other cases, is the most random, with a comparative lower autocorrelation value. On the other hand, it is long enough to support all the preamble and pilot symbols given by Fig. 3. As a result, the training sequence employed for the 150 kHz MC system [13] is suggested for use under ITU-R M.184-1. Note that the preamble and pilot symbols used for ITU-R M.184-1 share the same phase locus [13].

4. Performance Enhancement by Channel Estimator

In order to maintain SANET performance when employing the ITU-R M.184-1 specification under a maritime channel model in a coastline area, we examine three channel estimation schemes in this section. The examined channel estimation schemes include the 2*1-Dimensional Wiener Filter Estimator (2*1-D WFE) [15], the 2-Dimensional Wiener Filter Estimator (2-D WFE) [16], and the Maximum Likelihood Estimator (MLE) [17]. This is because these three channel estimation schemes are well-designed with a better performance than the conventional channel estimator, e.g., zero-forcing (ZF) estimator, for the orthogonal frequency division multiplexing (OFDM) system. On the other hand, they are practical and commercialized algorithms that are adaptive for the ITU-R M.184-1 specification also.

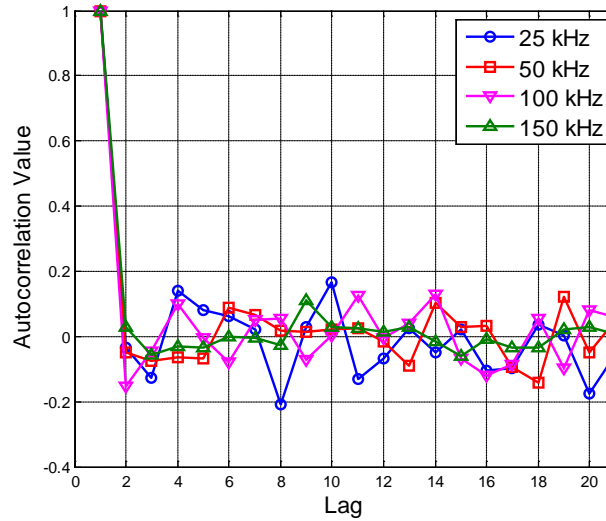


Fig. 4. Autocorrelations of pilot sequences in TETRA.

4.1 2*1-Dimensional Wiener Filter Estimator

For 2*1-D WFE, the frequency dimension Wiener filter was intended to enable channel estimation at first. Let $d(i)$ and $p(j)$ denote the positions of the i^{th} datum and the j^{th} reference signal sub-carrier in the frequency dimension, respectively, and R_{hp} and R_{pp} are cross-correlation and auto-correlation functions defined by Nee and Prasad [15], we have the estimated channel in the frequency domain as

$$\hat{H}_f = R_{hp}^f (R_{pp}^f + \sigma^2 I)^{-1} \hat{H}_p, \quad (2)$$

where \hat{H}_p is the channel information of the reference signal. After that, the time-dimension Wiener filter is applied with the results of frequency dimension estimation as

$$\hat{H} = R_{hp}^i (R_{pp}^i + \sigma^2 I)^{-1} \hat{H}_f. \quad (3)$$

4.2 2-Dimensional Wiener Filter Estimator

2-D WFE is based on a minimum mean-square error (MMSE) criterion and has good effect in avoiding noise amplification. It has high complexity but better performance than 2*1-D WFE. The 2-D WFE channel estimator is given as

$$\hat{H} = R_{h\hat{p}} R_{\hat{p}\hat{p}}^{-1} \hat{H}_p, \quad (4)$$

where $R_{h\hat{p}}$ and $R_{\hat{p}\hat{p}}$ are the cross-correlation and auto-correlation matrix between h and the reference signal estimates p , respectively, given as

$$R_{\hat{h}_p} = E \left\{ H \hat{H}_p^H \right\}, \quad (5)$$

$$R_{\hat{p}\hat{p}} = E \left\{ H \hat{H}_p^H \right\} = R_{pp} + \frac{1}{SNR} I, \quad (6)$$

4.3 Maximum Likelihood Estimator

MLE can be interpreted as a translation of the frequency response of the reference signal channel information to the time domain, which is followed by a linear transformation and retranslation to the frequency domain [18]. Based on a maximum likelihood algorithm and the channel information at the reference signal position, we can get the channel information of one estimated symbol, which contains reference signals, with the following:

$$\hat{H}_{MLE}(n) = \sum_{m=0}^{N_p-1} \hat{H}_p(m) p_{MLE}(n, m). \quad (7)$$

The maximum likelihood matrix p_{MLE} is defined by

$$p_{MLE}(n, m) = \sum_{k=0}^{L-1} \left[\left(B^H B \right)^{-1} B^H \right]_{k, m} e^{-j2pnk/N}, \quad (8)$$

$$[B]_{n, k} = e^{-j2pki_n/N}, \quad (9)$$

where B represents the Fourier transform matrix of reference signals, and i_n is the index of the reference signal. The MLE is based on the assumption that \hat{H}_{MLE} is a deterministic but unknown vector. The estimate of \hat{H}_{MLE} is derived from the linear model (7), where p_{MLE} is the maximum likelihood matrix, which is composed of Fourier transform matrix of reference signals position.

4.4 Performance Evaluation with Channel Estimators

Fig. 5 compares the bit-error-rate (BER) performances of the above three channel estimators for ITU-R M.184-1 under the maritime channel model in coastline areas. Note that throughout the paper, channel coding is not employed, and the symbol modulation is 16-QAM. According to **Fig. 5**, using frequency domain 1-tap equalization (FDOE) provides the worst performance, where the BER error floor starts at 30 dB and never reaches 10^{-3} . This is mainly because the MC system performance without CP under a maritime channel model in coastline areas is seriously limited by the ISI caused by selective fading. The 2*1-D WFE can increase BER performance; however, the BER of 2*1-D WFE also does not reach 10^{-3} . Compared with 2*1-D WFE, MLE shows a better capability to improve BER performance, where it can reach the target BER of 10^{-3} at 45 dB. However, with good capability to avoid noise amplification, 2-D WFE has the best performance compared with other estimators that can achieve the target

BER of 10^{-3} at 36 dB of E_b/N_0 . Consequently according to the simulation results demonstrated by Fig. 5, 2-D WFE is suggested for use in the SANET when ships communicate with each other in coastline areas.

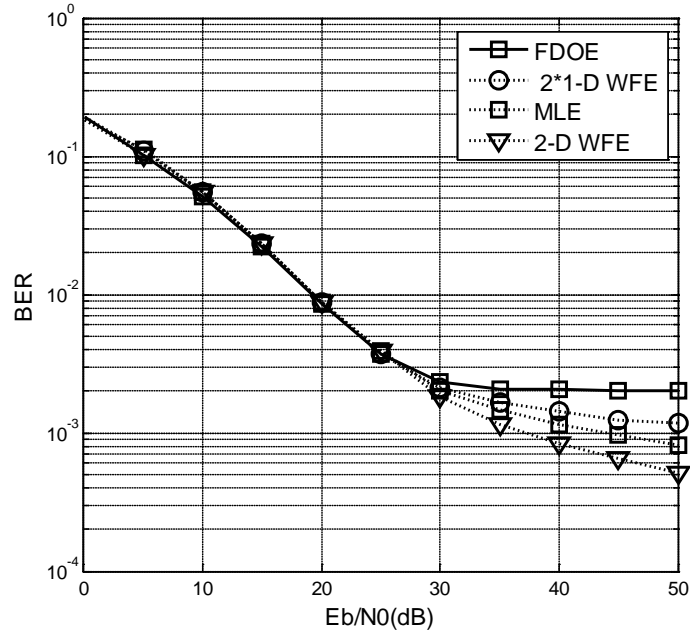


Fig. 5. BER performance enhancement by channel estimator.

5. Performance Enhancement by Channel Equalization

OFDM system performance is reduced dramatically because the length of the CP is not long enough to eliminate the ISI effects. Thus, an OFDM system with a small CP cannot perform well with a comparatively large delay. In ITU-R M.184-1 [11], the CP is set to zero, where the iterative techniques can be employed to overcome the problem of CP insufficiency [19]-[27]. In this paper, we employ the residual inter-symbol interference cancellation (RISIC) algorithm for the SANET under a maritime channel model in a coastline area [18], where a symbol hard decision block (SHDB) is additionally proposed based on the RISIC algorithm.

To obtain the desired system output along with the residual ISI, two steps are proposed by Kim and Stuber [19]. The first step is to remove the residual ISI from the previously received OFDM symbol, and the second step is to use reconstruction to restore the cyclicity in order to avoid the ICI. These two steps are called tail cancellation and cyclicity reconstruction, respectively. The overall procedure of the RISIC algorithm can be described with Equation (10), where the residual ISI, denoted as the second term, is removed from the received signal sequence $\{r_{i,k}\}_{k=0}^{N-1}$ before the iteration process. Cyclicity, on the other hand, is restored by the last term in Equation (10) to avoid ICI via the iteration process. In Equation (10), N denotes the fast Fourier transform (FFT) size, h_m refers to the m^{th} delayed channel with a delayed spread of d_m , and $*$ is the notation of convolution.

$$\hat{r}_{i,k} = r_{i,k} - \sum_{k=N-d_m}^{N-1} h_m * x_{i-1,k} + \sum_{k=0}^{d_m-1} h_m * x_{i,k}. \tag{10}$$

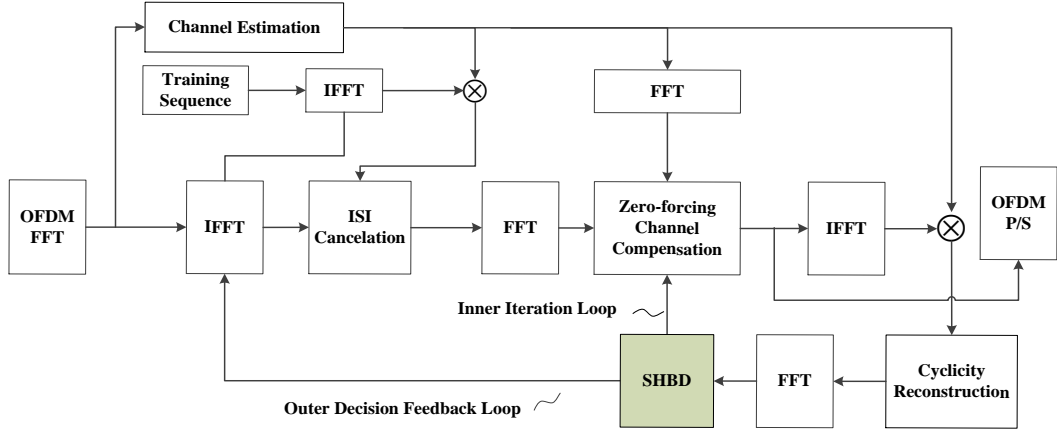


Fig. 6. Structure of the proposed RISIC with SHDB.

In order to further enhance RISIC performance, we modify the RISIC algorithm by adding the SHDB, as shown in Fig. 6, where the SHDB is carried out after the ‘converting the decided signal to the frequency domain’ step of Kim and Stuber [19]. The SHDB is implemented for the decision on frequency-domain symbol sequence associated with correct constellation positions. The usage of the SHDB can prevent the outputs from the error propagations, which are fed back to the outer and inner loops in Fig. 6.

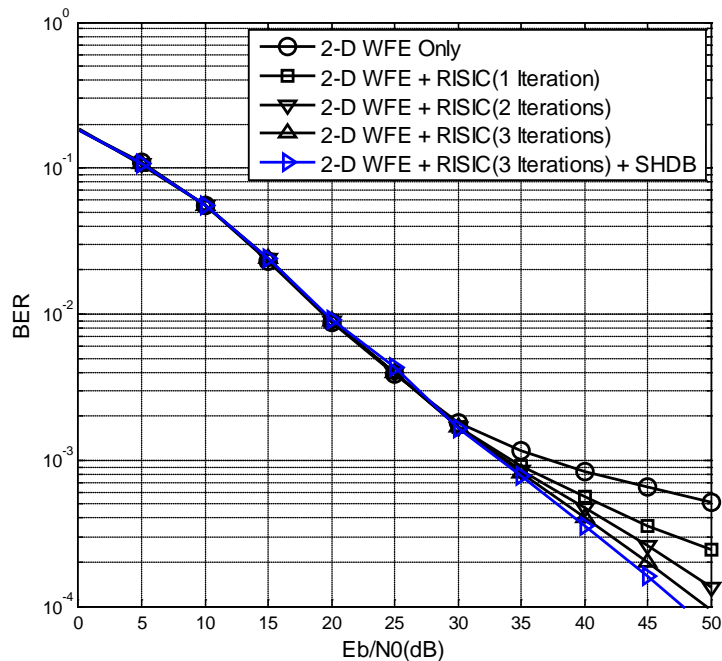


Fig. 7. BER performance enhancement by the proposed RISIC with SHDB.

Based on the TRB of **Fig.3** and 2-D WFE, **Fig. 7** demonstrates the BER performance when the RISIC algorithm is employed. According to **Fig. 7**, we observe that situations with the RISIC algorithm can achieve more than 3 dB signal-to-noise ratio (SNR) gain at the target BER of 10^{-3} compared with situations not employing the RISIC algorithm for ITU-R M.184-1 under the coastline maritime channel model. In addition, BER performance is increased with a higher number of iterations for the inner loops. **Fig. 7** also shows the efficiency of the proposed SHDB, where the SNR gain is obtained by implementing the SHDB based on RISIC. For example, almost 2 dB SNR gain is achieved in the case of the proposed RISIC with the SHDB at a target BER of 10^{-4} . This confirms the validity of the proposed SHDB for preventing the outputs from the error propagations that are fed back to the outer and inner loops, as illustrated in **Fig. 6**.

5. Conclusions


For the purpose of providing high data-rate services, the RTT design standardized by ITU-R M.184-1 for a SANET is discussed in this paper, where the physical layer parameters of ITU-R M.184-1 are contrived to meet the requirements of modern maritime applications. However, according to our studies, several specification items are still under “to be decided” status. The SANET performance evaluation could not be examined without details about those items, especially for the physical layer. In this paper, we analyzed the TRB with a TETRA-like pilot pattern for ITU-R M.184-1. Based on the analyzed TRB, we evaluated the SANET performance under a coastline maritime channel model. In order to avoid noise amplification and overcome the ISI caused by selective fading, several novel and practical strategies are suggested and compared in the channel estimation and equalization procedures. According to the link-level simulation results, 2-D WFE used in channel estimation and the proposed RISIC with SHDB employed in channel equalization are recommended for use in ship-to-ship communications in coastline areas.

References

- [1] H.S. Lee, S.M. Lee, and H.H. Lee, “The realization of the performance estimation system on AIS SOTDMA algorithm,” in *Proc. of INDIN*, pp. 405–410, July 2007. [Article \(CrossRef Link\)](#)
- [2] S.M. Mun, J.Y. Son, W.R. Jo, and W.B. Lee, “An implementation of AISbased Ad hoc routing(AAR) protocol for maritime data communication networks,” in *Proc. of ICNC*, pp. 1007–1010, May 2012. [Article \(CrossRef Link\)](#)
- [3] M.L. Hao, G. Yu, C.P. Ai, and J.S. Pathmasuntharam, “Performance study on delay tolerant networks in maritime communication environments,” in *Proc. of OCEANS*, pp. 1–6, May 2007. [Article \(CrossRef Link\)](#)
- [4] X. Su, B. Hui, K.H. Chang, and G.J. Jin, “Case study of 3GPP LTE and IEEE 802.11p systems for ship ad-hoc network,” in *Proc. of APCC*, pp. 546–547, Oct. 2012. [Article \(CrossRef Link\)](#)
- [5] X. Su, B. Hui, K.H. Chang, and S.G. Kim, “Improvement of the link reliability for ship ad-hoc network by employing multiple antennas,” *KICS Journal*, vol. 37A, No. 12, pp. 1065–1075, July 2012. [Article \(CrossRef Link\)](#)
- [6] B. Hui, K.H. Jeon, K.H. Chang, S.G. Kim, J.W. Park, and Y.H. Lim, “Design of radio transmission technologies for VHF band ship ad-hoc network,” in *Proc. of ICTC*, pp. 626–629, Oct. 2007. [Article \(CrossRef Link\)](#)

- [7] K.H. Jeon, B. Hui, K.H. Chang, S.G. Kim, S.M. Kim, and Y.K. Lim, "Performance analysis of channel compensation and channel coding techniques based on measured maritime wireless channel in VHF-band ship ad-hoc network," *KICS Journal*, vol. 36, No. 5, pp. 517-529, May 2011. [Article \(CrossRef Link\)](#)
- [8] K.M. Cho, C.G. Kang, and C.H. Yun, "Transmission rate control of ASO-TDMA in multi-hop maritime communication network," in *Proc. of ICTC*, pp. 85–86, Oct. 2012. [Article \(CrossRef Link\)](#)
- [9] C.H. Yun and Y.K. Lim, "ASO-TDMA: ad-hoc self-organizing TDMA protocol for shipborne ad-hoc networks," *EURASIP Journal on Wireless Commun.*, online published: <http://jwcn.eurasipjournals.com/content/2012/1/320>. [Article \(CrossRef Link\)](#)
- [10] Y. Huang, B. Hui, X. Su, and K.H. Chang, "Self-weighted decentralized cooperative spectrum sensing based on notification for hidden primary user detection in SANET-CR network," *KSII Transactions on Internet and Information Systems*, vol. 7, no. 11, pp. 2561–2576, Nov. 2013. [Article \(CrossRef Link\)](#)
- [11] Recommendation ITU-R M.1842-1, 5B/780-E, Characteristics of VHF radio systems and equipment for the exchange of data and electronic mail in the maritime mobile service, Nov. 2011. [Article \(CrossRef Link\)](#)
- [12] K. Yang, T. Roste, F. Bekkadal, and T. Ekman, "Channel characterization including path loss and Doppler effects with sea reflections for mobile radio propagation over sea at 2GHz," in *Proc. of WCSP*, pp. 1–6, Oct. 2010. [Article \(CrossRef Link\)](#)
- [13] ETSI TS 100 392-2 v3.6.1. Terrestrial trunked radio (TETRA), Voice plus data (V+D), Part 2: Air interface (AI), May 2013. [Article \(CrossRef Link\)](#)
- [14] D.H. Kim, Development of maritime digital VHF system based on ITU-R WP5B M.1842-1, Feb. 2011. [Article \(CrossRef Link\)](#)
- [15] R. Nee and R. Prasad, *OFDM for Wireless Multimedia Communications*, 1st Edition, Artech House Publishers, Boston London, 2000. [Article \(CrossRef Link\)](#)
- [16] A.R. Varma, C.R. N. Athaudage, L.L. H. Andrew, and J.H. Manton, "Optimal superimposed pilot selection for OFDM channel estimation," in *Proc. of IEEE SPAWC*, pp. 1-5, July 2006. [Article \(CrossRef Link\)](#)
- [17] M. Morelli and U. Mengali, "A comparison of pilot-aided channel estimation methods for OFDM systems," *IEEE Transactions on Signal Processing*, vol. 49, no. 12, pp. 3065-3073, Dec. 2001. [Article \(CrossRef Link\)](#)
- [18] M. Morelli and U. Mengali, "A comparison of pilot-aided channel estimation methods for OFDM systems," *IEEE Transactions on Signal Processing*, vol.49, no.12, pp. 3065-3073, Dec. 2001. [Article \(CrossRef Link\)](#)
- [19] D. Kim and G. L. Stuber, "Residual ISI Cancellation for OFDM with application to HDTV broadcasting," *IEEE Journal on Selected Areas in Communication*, vol. 16, no. 8, pp. 1590-1599, Oct. 1998. [Article \(CrossRef Link\)](#)
- [20] Z. Yang, W. Bai, and Z. Lin, "A decision-aided residual ISI cancellation algorithm for OFDM systems," in *Proc. of ICOSP Int. Conf.*, pp. 20-23, Nov. 2006. [Article \(CrossRef Link\)](#)
- [21] Z. Yang, W. Bai, and Z. Lin, "A novel residual ISI cancellation for OFDM system with applications to wireless LAN," in *Proc. of IET Int. Conf.*, pp. 1-4, Nov. 2006. [Article \(CrossRef Link\)](#)
- [22] W. Zhong and Z. G. Mao, "Efficient time-domain residual ISI cancellation for OFDM-based WLAN systems," *IEEE Trans on Consumer Electronic*, vol. 52, no. 2, pp. 321-326, May 2006. [Article \(CrossRef Link\)](#)
- [23] C. Park and G. Im, "Efficient cyclic prefix reconstruction for coded OFDM systems," *IEEE Communications Letters*, vol. 8, no. 5, pp. 274-276, May 2004. [Article \(CrossRef Link\)](#)
- [24] J. Zhu, W. Ser, A. Nehorai, "Channel equalization for DMT with insufficient cyclic prefix," in *Prof. of Signals, Systems and Computers*, pp. 951-955, Oct. 2000. [Article \(CrossRef Link\)](#)
- [25] Lesch, Wolfgang. Impulse Response Shortening for OFDM in a Single Frequency Network. *MS thesis*, Royal Institute of Technology, Stockholm, 1998. [Article \(CrossRef Link\)](#)
- [26] S. K. Ahn and Y. C. Yang, "A novel subblock-based frequency-domain equalizer over doubly-selective channels," *IEEE Communications Letters*, vol. 17, no. 8, pp. 1517- 1520, Aug. 2013. [Article \(CrossRef Link\)](#)

- [27] X. Su, B. Hui, and K.H. Chang, "Robust decision feedback equalizer for OFDM system under severe ISI channel," *Transactions on Internet and Information Systems*, vol. 8, no. 6, pp. 1914-1925, June 2014. [Article \(CrossRef Link\)](#)



Xin Su received B.E. degree in Computer Engineering from Kunming University of Science and Technology, China, in 2008. He received his M.E. in computer engineering from Chosun University, Korea, in 2010. In 2015, he received his Ph.D. degree in the Program in IT & Media Convergence Studies, Inha University, Korea. He is currently with the College of Internet of Things Engineering, Hohai University, China. His research interests include 3GPP LTE(-A) systems, MIMO beamforming, antenna pattern and polarization-based MIMO systems, wireless backhaul solutions, and mobile ad-hoc networks.



HaiFeng Yu received his BS in communication engineering from Shenyang Aerospace University, Shenyang, China, in 2013. Since 2013, he has been working as an MS student in the Electronic Engineering Department, Inha University, Korea. His research interests include underwater acoustic communication systems, non-orthogonal multiple access (NOMA) with successive interference cancellation (SIC), and mobile ad-hoc networks.



KyungHi Chang received his BS and MS in electronics engineering from Yonsei University, Seoul, Korea, in 1985 and 1987, respectively. He received his PhD in electrical engineering from Texas A&M University, College Station, Texas, in 1992. From 1989 to 1990, he was with the Samsung Advanced Institute of Technology (SAIT) as a member of the research staff and was involved in digital signal processing system design. From 1992 to 2003, he was with the Electronics and Telecommunications Research Institute (ETRI) as a principal member of the technical staff. During this period, he led the design teams working on the WCDMA UE modem and 4G radio transmission technology (RTT). He is currently with the Electronic Engineering Department, Inha University, where he has been a professor since 2003. His current research interests include RTT design for Beyond 3GPP LTE-A & 5G systems, cross-layer design, cognitive radio, and mobile ad-hoc networks. Dr. Chang has served as a senior member of IEEE since 1998, and as an editor-in-chief & an executive director from 2010–2012 and in 2013, respectively, for the *Journal of Korean Institute of Communications and Information Sciences* (KICS). Currently, he is an executive director for business affairs for mobile communications at KICS. He has also served as an editor of ITU-R TG8/1 IMT.MOD. He is a recipient of the LG Academic Awards (2006), Haedong Best Paper Awards (2007), IEEE ComSoc Best Paper Awards (2008), and Haedong Academic Awards (2010).



Seung-Geun Kim received the B.S. degree in Electronic Engineering from Inha University, Incheon, Korea, in 1995, and M.S. and Ph.D. degree in Information and Communications from Gwangju Institute of Science and Technology (GIST), Gwangju, Korea, in 1997 and 2002, respectively. Since 2002, he has worked for the Korea Research Institute of Ships and Ocean Engineering (KRISO), KORDI, as a Principal researcher. His research interests include 4S VHF digital communication system for e-navigation and GMDSS modernization, acoustic underwater communications, digital modulation and demodulation system design, and its implementation.



Yong-Kon Lim received the M.S. degrees in power and electrical engineering from the Chung-Nam University in 1984 and Ph. D. degrees in electronic engineering from the A-Jou University in 1994, respectively. He has been working at Korea Research Institute of Ships and Ocean Engineering (KRISO) since 1980. Presently, he is a principal researcher and an affiliate professor in that of Ocean Systems Engineering (OSE) at Korea Advanced Institute of Science and Technology (KAIST). His main interests are underwater acoustic telecommunication, underwater acoustic network, integrated logistic system for Ocean, and integrated communication system for ships.